

Table of contents

Delta Real-Time Forecast Summary	1
Common Assumptions	1
Reclamation Forecast Flow and Export Data	2
Delta Export Zone of Influence	3
PTM (Particle Tracking Model) Results	10
Neutrally Buoyant Particles (NP)	11
Surface Oriented Particles (PP)	17
ECO-PTM (Ecological Particle Tracking Model)	31
Longfin Smelt Larval Population and PTM Analysis	40

Delta Real-Time Forecast Summary

Date Published: *October 05, 2026*

Forecast Period: 06/16/2026 – 07/06/2026

Forecast Week 1: 06/16/2026 – 06/22/2026

Forecast Week 2: 06/23/2026 – 06/29/2026

Forecast Week 3: 06/30/2026 – 07/06/2026

Common Assumptions

The model run results cover the period June 16, 2026 through July 06, 2026 and are based on the following assumptions established by DWR:

1. CCFB Gates are operating to Priority 2.
2. The Delta Cross Channel gates are closed and will be open on June 27.
3. Suisun Marsh Salinity Control flashboards are in. All three gates will be in tidal operation starting June 19.
4. San Joaquin River flow at Vernalis is at 1,190 cfs at the beginning of the forecast period and is estimated to decrease to 500 cfs by the end of the forecast period.
5. San Joaquin River EC at Vernalis is at 363 umhos/cm at the beginning of the forecast period and is estimated to increase to 996 umhos/cm at the end of the forecast period.
6. Sacramento River flow at Freeport is at 11,970 cfs at the beginning of the forecast period and is expected to increase to 22,500 cfs by the end of the forecast period.

7. CCFB inflow is at 297 cfs at the beginning of the forecast period and is expected to increase to 6,500 cfs by the end of the forecast period.
8. Export at Jones Pumping Plant is at 923 cfs at the beginning of the forecast period and is expected to increase to 4,200 cfs to the end the forecast period.
9. The Middle River barrier gates are in intermediate tidal operation starting June 2, and will move to full operation starting June 30.
10. The Old River near Tracy barrier gates are in intermediate tidal operation starting June 1, and will move to full operation starting June 30.
11. The Grant Line Canal barrier gates will be in intermediate tidal operation starting June 9, and will move to full operation starting June 30.

As shown in the next section, assumptions 4 and 6 are updated based on Reclamation forecast data, and assumption 8 and exports at Banks Pumping Plant have been modified to include four different forecast scenarios at an Old and Middle River (OMR) index of -6,500 cfs, -5,000 cfs, -3,500 cfs, and -2,000 cfs.

Reclamation Forecast Flow and Export Data

Table 1: Weekly Averaged Forecasted Flow Data and Flow Bins

Forecast Week	Sacramento River at Freeport (cfs)	Sac Flow Bin	San Joaquin River at Vernalis (cfs)	SJR Flow Bin	Delta Inflow Bin
Week 1 (06/16/2026 - 06/22/2026)	12,103	lo	1,497	lo	lolo
Week 2 (06/23/2026 - 06/29/2026)	11,956	lo	1,345	lo	lolo
Week 3 (06/30/2026 - 07/06/2026)	11,950	lo	1,345	lo	lolo

Key: cfs = cubic feet per second, Sac = Sacramento River, SJR = San Joaquin River

Table 2: Weekly Averaged CVP and SWP Exports by OMR Bin

Forecast Week	OMR Bin (cfs)	CVP Exports (cfs)	SWP Exports (cfs)	Total Exports (cfs)	CVP Exports (%) of total)	SWP Exports (%) of total)
Week 1: 06/16/2026 – 06/22/2026	-5,000	2,662	2,504	5,166	52%	48%
Week 1: 06/16/2026 – 06/22/2026	-3,500	1,803	1,760	3,563	51%	49%
Week 1: 06/16/2026 – 06/22/2026	-2,000	902	973	1,875	48%	52%
Week 2: 06/23/2026 – 06/29/2026	-5,000	2,805	2,261	5,066	55%	45%
Week 2: 06/23/2026 – 06/29/2026	-3,500	1,803	1,603	3,406	53%	47%
Week 2: 06/23/2026 – 06/29/2026	-2,000	902	859	1,761	51%	49%
Week 3: 06/30/2026 – 07/06/2026	-5,000	2,805	2,204	5,009	56%	44%
Week 3: 06/30/2026 – 07/06/2026	-3,500	1,803	1,603	3,406	53%	47%
Week 3: 06/30/2026 – 07/06/2026	-2,000	902	802	1,704	53%	47%

Notes:

¹ One pumping unit is currently out of service at Jones Pumping Plant until August 2026. The current maximum pumping rate at Jones Pumping Plant (CVP Exports) is 4,200 cfs.

² There is still a low probability an OMR of -6,500 cfs would be realized, so that scenario is omitted from this assessment.

Key: cfs = cubic feet per second, CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

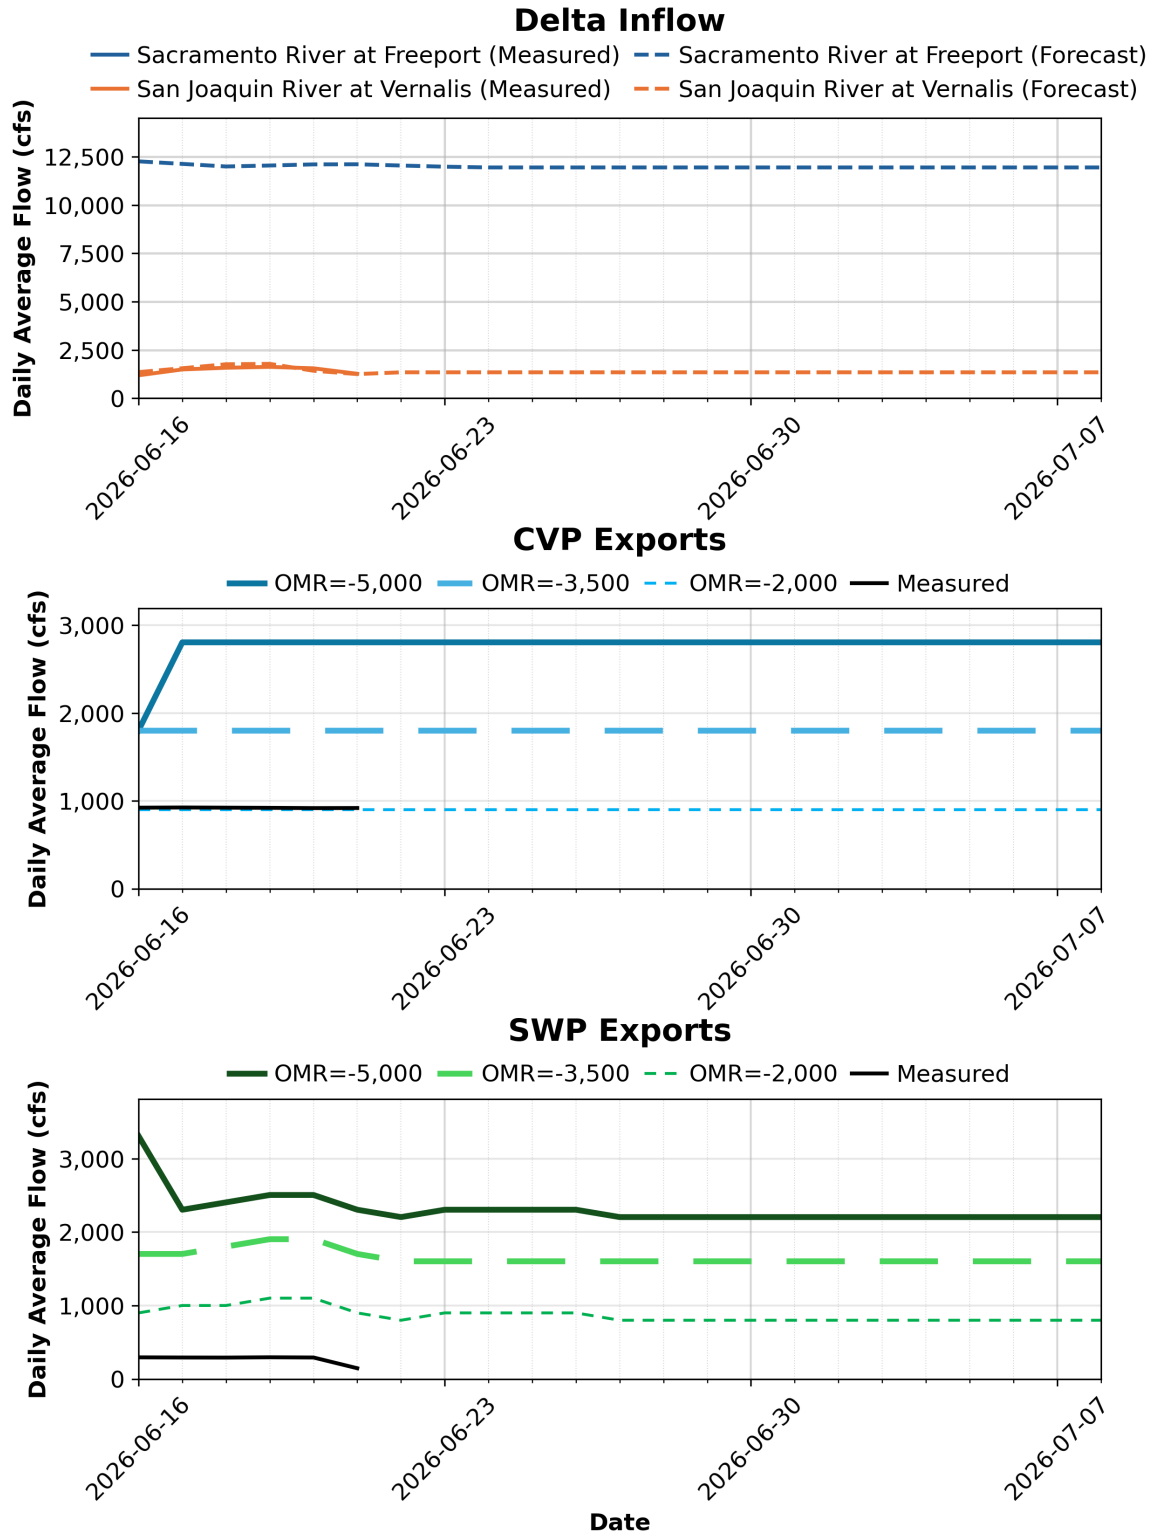


Figure 1: Daily Average Flow for Measured and Forecasted Delta Inflow, CVP Exports, and SWP Exports

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

Delta Export Zone of Influence

Notes: Contours indicate the proportional overlap of hourly average velocity Gaussian KDEs for a one-week period from DSM2 hydro simulations with and without Delta exports active. DSM2 nodes that were sufficiently different from neighboring nodes to create isolated contours at several OMR flows were removed.

Key: cfs = cubic feet per second, OMR = Old and Middle River

Notes: Contours indicate the proportional overlap of hourly average velocity Gaussian KDEs for a one-week period from DSM2 hydro simulations with and without Delta exports active. DSM2 nodes that were sufficiently different from neighboring nodes to create isolated contours at several OMR flows were removed.

Key: cfs = cubic feet per second, OMR = Old and Middle River

Notes: Contours indicate the proportional overlap of hourly average velocity Gaussian KDEs for a one-week period from DSM2 hydro simulations with and without Delta exports active. DSM2 nodes that were sufficiently different from neighboring nodes to create isolated contours at several OMR flows were removed.

Key: cfs = cubic feet per second, OMR = Old and Middle River

Table 3: Proportion of DSM2 Channel Length with Hydrologic Alteration from Pumping

Weekly Model Run	OMR Bin (cfs)	Sum	Channel	Sum	Channel	Sum	Channel
		Channel Length with Low HA (miles)	Length with Low HA (%)	Channel Length with Medium HA (miles)	Length with Medium HA (%)	Channel Length with High HA (miles)	Length with High HA (%)
Week 1: 06/16/2026	-	652.23	96.8%	19.84	2.9%	1.58	0.2%
- 06/22/2026							
Week 1: 06/16/2026	-	652.23	96.8%	19.84	2.9%	1.58	0.2%
- 06/22/2026							

Table 3: Proportion of DSM2 Channel Length with Hydrologic Alteration from Pumping

Weekly Model Run	OMR Bin (cfs)	Sum Channel Length with Low HA (miles)	Channel Length with Low HA (%)	Sum Channel Length with Medium HA (miles)	Channel Length with Medium HA (%)	Sum Channel Length with High HA (miles)	Channel Length with High HA (%)
Week 1: 06/16/2026	- 3,500	664.25	98.6%	8.55	1.3%	0.85	0.1%
- 06/22/2026							
Week 1: 06/16/2026	- 2,000	671.25	99.6%	1.55	0.2%	0.85	0.1%
- 06/22/2026							
Week 2: 06/23/2026	- 6,500	651.23	96.6%	21.58	3.2%	1.58	0.2%
- 06/29/2026							
Week 2: 06/23/2026	- 5,000	651.23	96.6%	21.58	3.2%	1.58	0.2%
- 06/29/2026							
Week 2: 06/23/2026	- 3,500	659.19	97.7%	14.35	2.1%	0.85	0.1%
- 06/29/2026							
Week 2: 06/23/2026	- 2,000	672.00	99.6%	1.55	0.2%	0.85	0.1%
- 06/29/2026							
Week 3: 06/30/2026	- 6,500	650.36	96.4%	22.45	3.3%	1.58	0.2%
- 07/06/2026							
Week 3: 06/30/2026	- 5,000	650.36	96.4%	22.45	3.3%	1.58	0.2%
- 07/06/2026							

Table 3: Proportion of DSM2 Channel Length with Hydrologic Alteration from Pumping

Weekly Model Run	OMR Bin (cfs)	Sum Channel Length with Low HA (miles)	Channel Length with Low HA (%)	Sum Channel Length with Medium HA (miles)	Channel Length with Medium HA (%)	Sum Channel Length with High HA (miles)	Channel Length with High HA (%)
Week 3: 06/30/2026	- 3,500	660.30	97.9%	13.24	2%	0.85	0.1%
- 07/06/2026							
Week 3: 06/30/2026	- 2,000	672.00	99.6%	1.55	0.2%	0.85	0.1%
- 07/06/2026							

Notes: Sum channel length includes the length of channels within the Delta that have a calculated hydrologic alteration level falling within each category.

Key: HA = hydrologic alteration, OMR = Old and Middle River

Key: cfs = cubic feet per second, OMR = Old and Middle River

PTM (Particle Tracking Model) Results

PTM Flux Evaluation Period: 06/16/2026 – 07/06/2026

Particles Injected: 06/16/2026

Neutrally Buoyant Particles (NP)

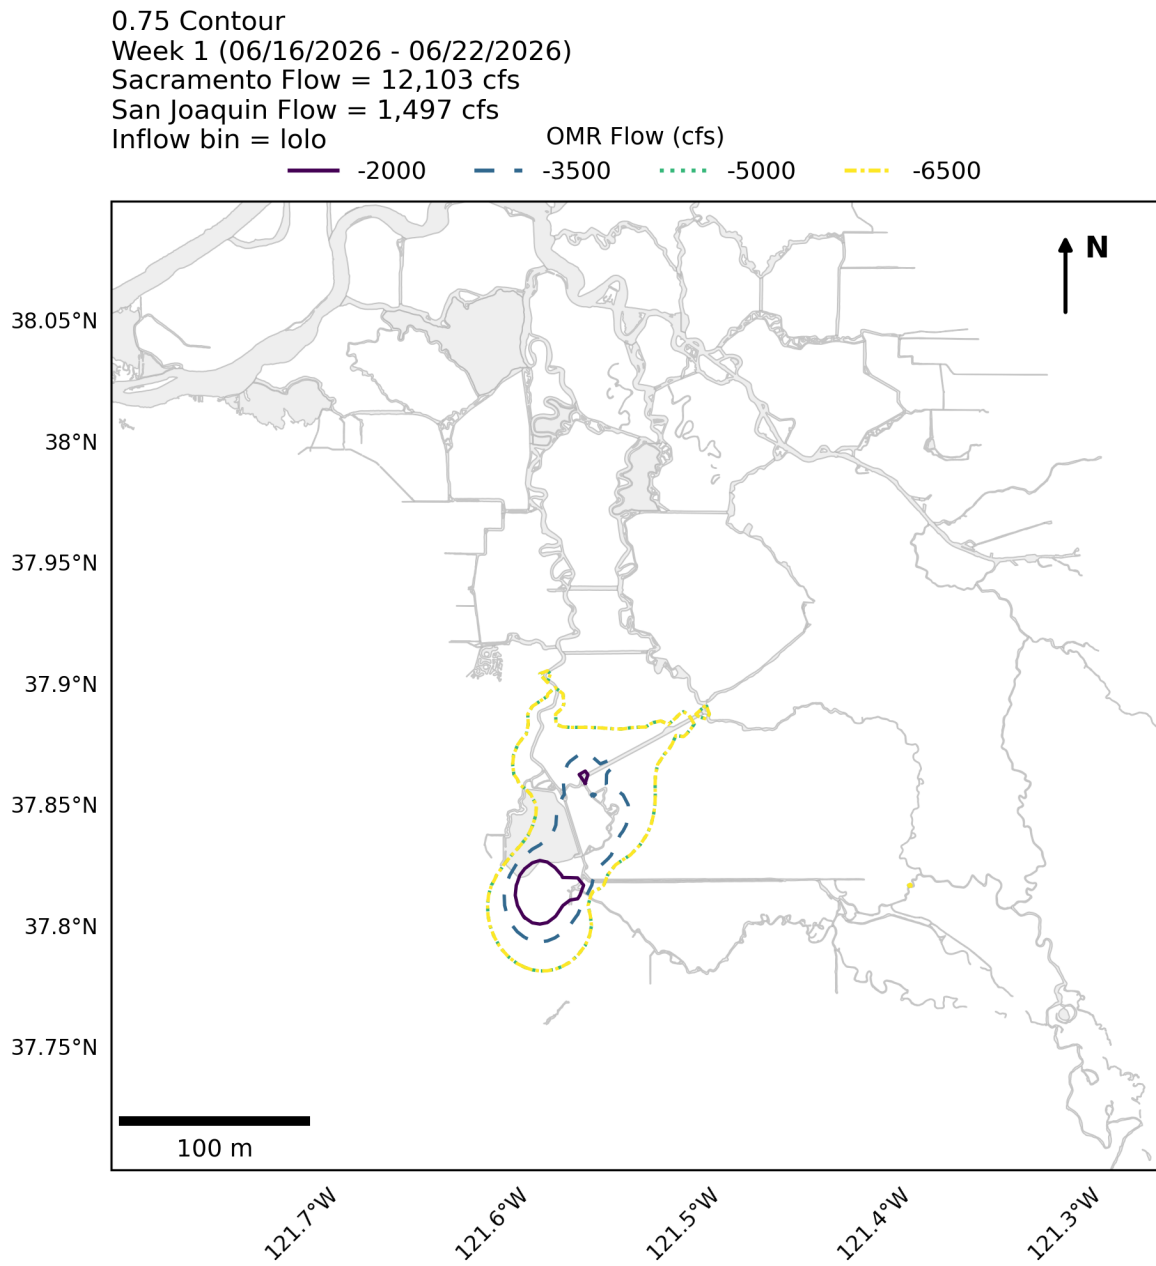


Figure 2: Delta Zone of Influence for Week 1

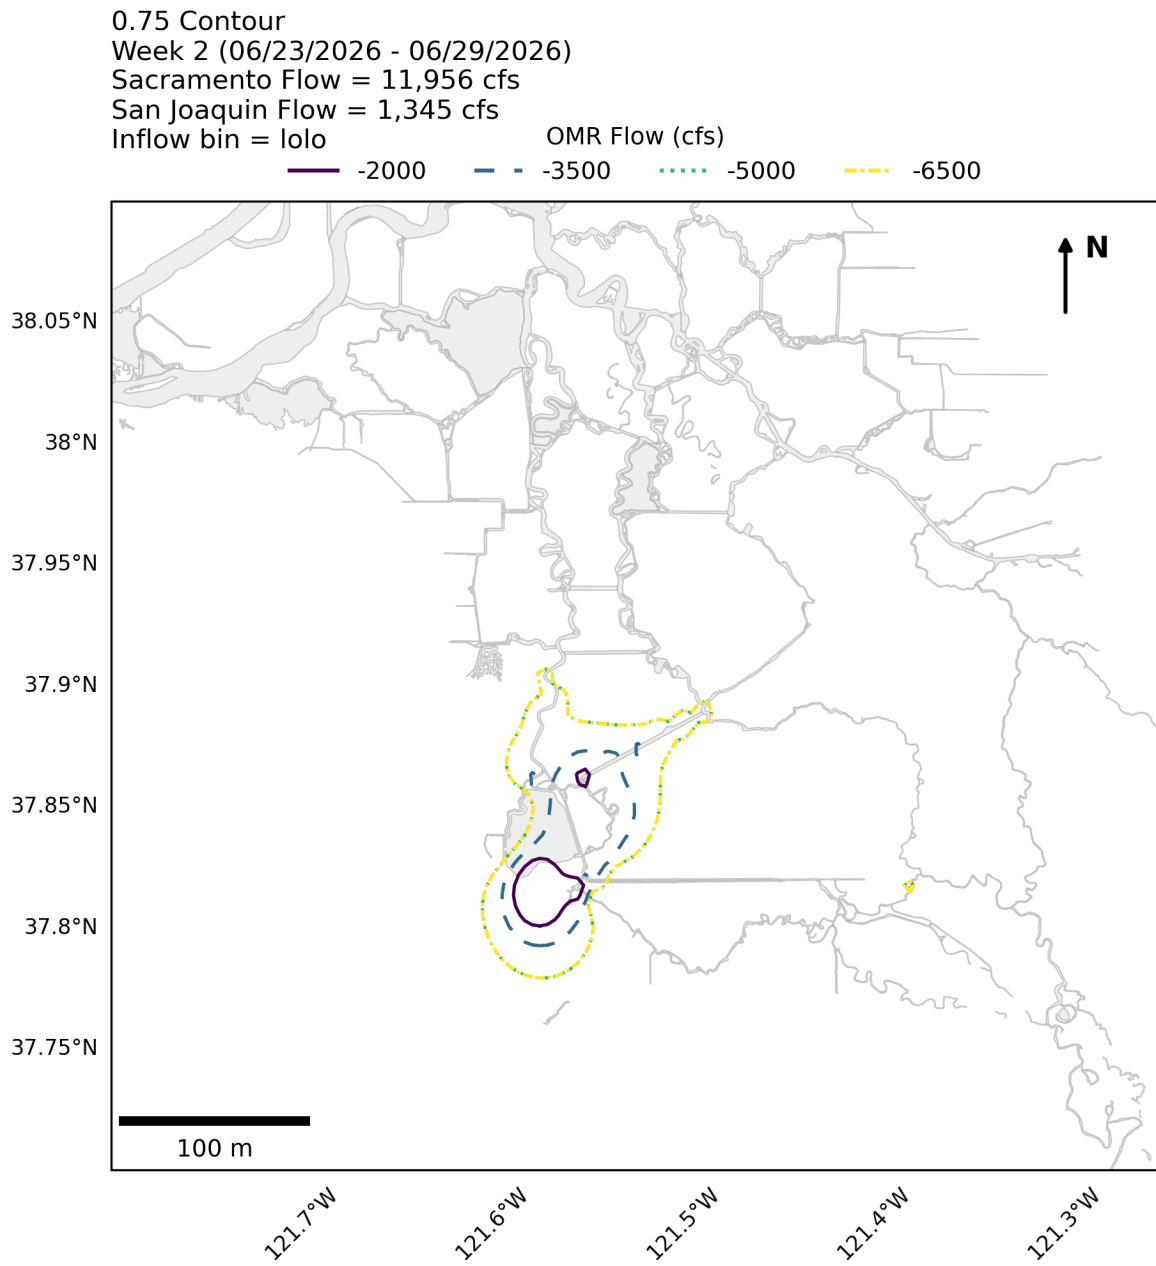


Figure 3: Delta Zone of Influence for Week 2

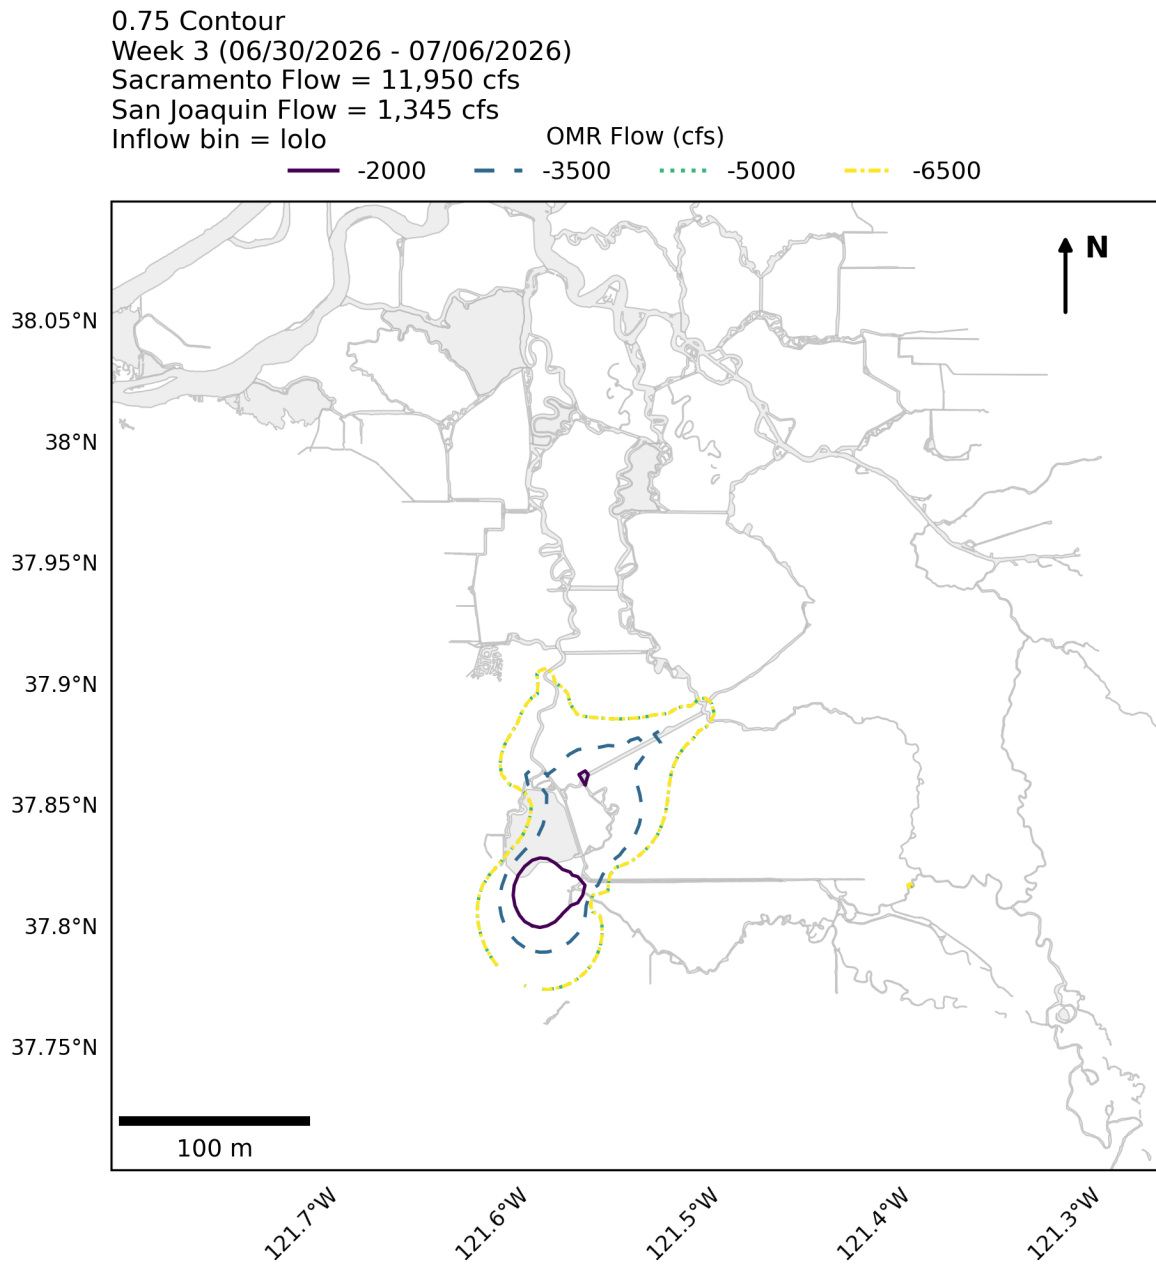


Figure 4: Delta Zone of Influence for Week 3

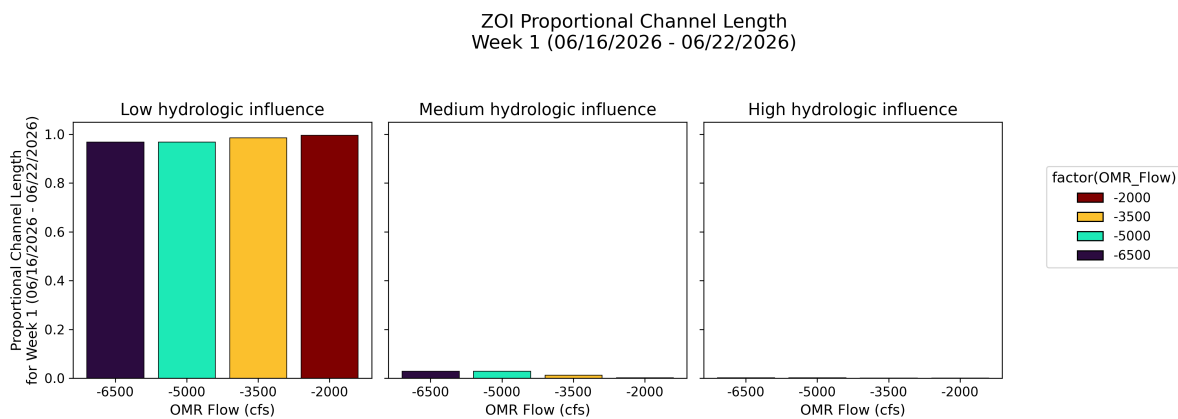


Figure 5: Proportional Channel Length for Week 1

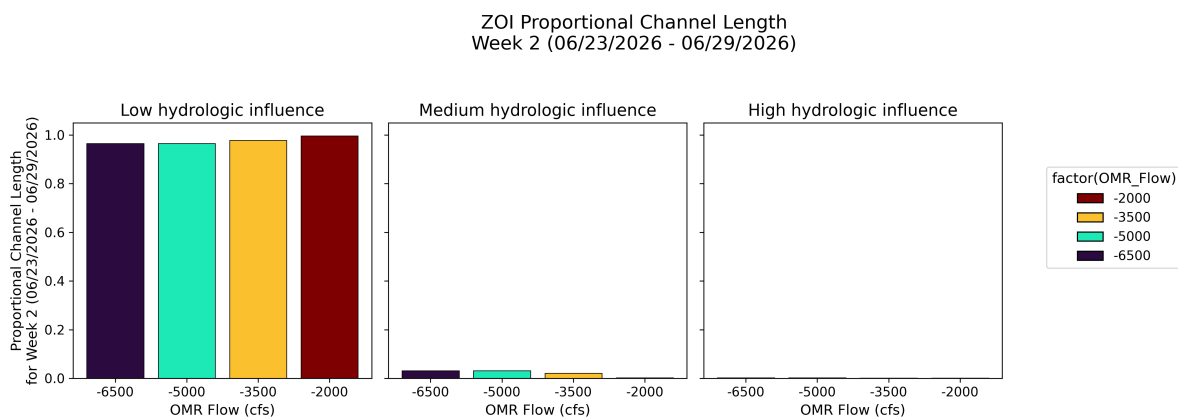


Figure 6: Proportional Channel Length for Week 2

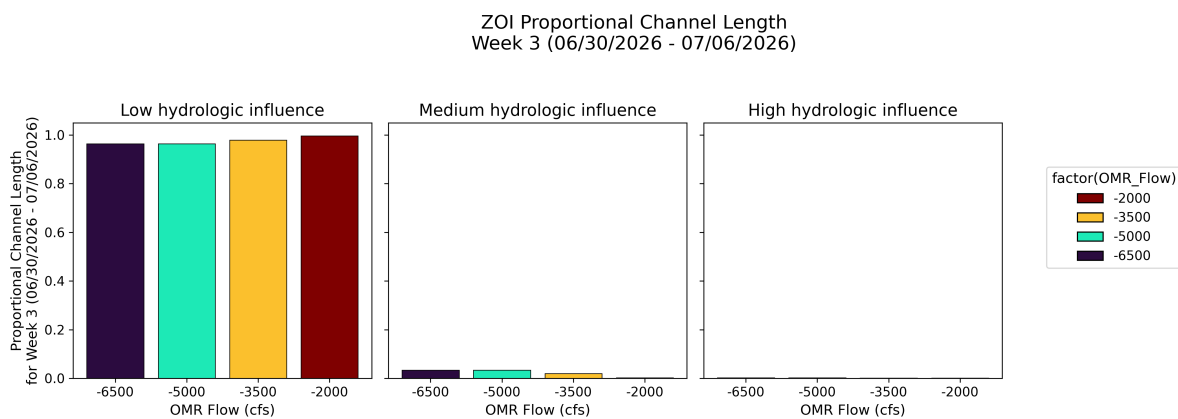


Figure 7: Proportional Channel Length for Week 3

PTM Injection and Flux Locations

- = Injection Point (DSM2 node)
- ▬ = Flux Location
- ➡ = Reference Flux Direction

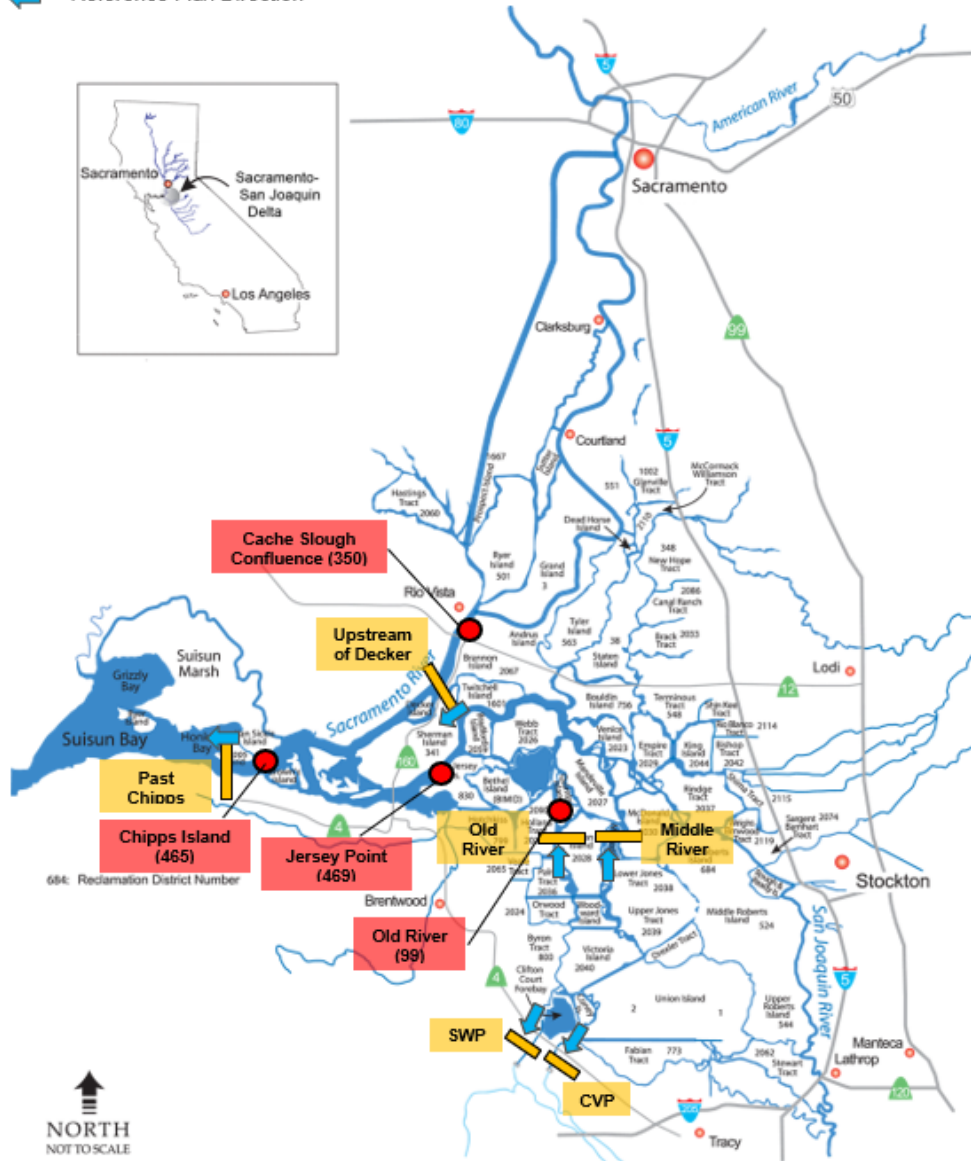


Figure 8: Map of PTM Injection and Flux Locations

Table 4: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Chipps (DSM2 Node 465)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up- stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En- train- ment	SWP En- train- ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	49.5	-0.1	50.5	0	0	0
Week 1: 06/16/2026 – 06/22/2026	-5,000	49.5	-0.1	50.5	0	0	0
Week 1: 06/16/2026 – 06/22/2026	-3,500	53.9	0	46.1	0	0	0
Week 1: 06/16/2026 – 06/22/2026	-2,000	61.1	-0.1	38.9	0	0	0
Week 2: 06/23/2026 – 06/29/2026	-6,500	67.3	0.9	32.8	0.1	0	0
Week 2: 06/23/2026 – 06/29/2026	-5,000	67.3	0.9	32.8	0.1	0	0
Week 2: 06/23/2026 – 06/29/2026	-3,500	74	0.4	26	0	0	0
Week 2: 06/23/2026 – 06/29/2026	-2,000	79.3	0.1	20.7	0	0	0
Week 3: 06/30/2026 – 07/06/2026	-6,500	69.5	0.9	30.8	0.2	0.1	0
Week 3: 06/30/2026 – 07/06/2026	-5,000	69.5	0.9	30.8	0.2	0.1	0
Week 3: 06/30/2026 – 07/06/2026	-3,500	76.8	0.6	23.2	0	0	0

Table 4: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Chipps (DSM2 Node 465)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 3: 06/30/2026 – 07/06/2026	-2,000	82.1	0.1	18	0.1	0	0

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

Table 5: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Cache Slough (DSM2 Node 350)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	1.4	54.9	98.8	0.2	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-5,000	1.4	54.9	98.8	0.2	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-3,500	1.2	57.8	99.0	0.2	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-2,000	1.3	58.9	98.7	-0.0	0.0	0.0
Week 2: 06/23/2026 – 06/29/2026	-6,500	18.8	68.5	83.2	1.2	0.5	0.3
Week 2: 06/23/2026 – 06/29/2026	-5,000	18.8	68.5	83.2	1.2	0.5	0.3

Table 5: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Cache Slough (DSM2 Node 350)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 2: 06/23/2026 – 06/29/2026	-3,500	22.9	69.5	78.1	0.7	0.1	0.2
Week 2: 06/23/2026 – 06/29/2026	-2,000	27.7	71.7	72.6	0.3	0.0	0.0
Week 3: 06/30/2026 – 07/06/2026	-6,500	24.5	71.8	80.2	2.6	1.4	0.7
Week 3: 06/30/2026 – 07/06/2026	-5,000	24.5	71.8	80.2	2.6	1.4	0.7
Week 3: 06/30/2026 – 07/06/2026	-3,500	29.8	73.7	73.1	1.5	0.9	0.5
Week 3: 06/30/2026 – 07/06/2026	-2,000	39.5	75.3	61.3	0.8	0.0	0.0

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

Table 6: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Jersey Point (DSM2 Node 469)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	1.4	13.4	100.8	2.0	0.1	0.1

Table 6: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Jersey Point (DSM2 Node 469)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-5,000	1.4	13.4	100.8	2.0	0.1	0.1
Week 1: 06/16/2026 – 06/22/2026	-3,500	1.6	14.4	99.7	1.2	0.1	0.0
Week 1: 06/16/2026 – 06/22/2026	-2,000	3.3	15.2	97.3	0.6	0.0	0.0
Week 2: 06/23/2026 – 06/29/2026	-6,500	12.5	25.2	95.8	5.5	1.8	1.0
Week 2: 06/23/2026 – 06/29/2026	-5,000	12.5	25.2	95.8	5.5	1.8	1.0
Week 2: 06/23/2026 – 06/29/2026	-3,500	18.3	25.4	85.9	3.2	0.9	0.1
Week 2: 06/23/2026 – 06/29/2026	-2,000	24.0	25.9	78.1	1.9	0.1	0.1
Week 3: 06/30/2026 – 07/06/2026	-6,500	18.2	29.1	95.7	6.0	4.8	3.1
Week 3: 06/30/2026 – 07/06/2026	-5,000	18.2	29.1	95.7	6.0	4.8	3.1
Week 3: 06/30/2026 – 07/06/2026	-3,500	25.3	29.9	82.3	4.7	2.4	0.5
Week 3: 06/30/2026 – 07/06/2026	-2,000	35.7	27.3	67.9	3.1	0.4	0.1

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

Table 7: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Old River (DSM2 Node 99)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	0.0	0.2	15.3	47.1	25.8	11.8
Week 1: 06/16/2026 – 06/22/2026	-5,000	0.0	0.2	15.3	47.1	25.8	11.8
Week 1: 06/16/2026 – 06/22/2026	-3,500	0.0	0.7	25.9	55.7	14.3	4.1
Week 1: 06/16/2026 – 06/22/2026	-2,000	0.0	0.5	47.0	52.9	0.0	0.1
Week 2: 06/23/2026 – 06/29/2026	-6,500	0.0	0.9	11.6	24.4	34.0	30.0
Week 2: 06/23/2026 – 06/29/2026	-5,000	0.0	0.9	11.6	24.4	34.0	30.0
Week 2: 06/23/2026 – 06/29/2026	-3,500	0.2	3.0	20.8	35.5	26.8	16.7
Week 2: 06/23/2026 – 06/29/2026	-2,000	1.1	4.2	41.3	41.7	13.0	2.9
Week 3: 06/30/2026 – 07/06/2026	-6,500	0.2	1.4	8.9	15.7	37.6	37.6
Week 3: 06/30/2026 – 07/06/2026	-5,000	0.2	1.4	8.9	15.7	37.6	37.6
Week 3: 06/30/2026 – 07/06/2026	-3,500	1.4	4.7	17.1	25.8	30.6	25.1

Table 7: Neutral Particle Fate (percent flux across boundary) for Particles Injected at Old River (DSM2 Node 99)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 3: 06/30/2026 – 07/06/2026	-2,000	4.4	7.0	32.9	38.1	17.0	7.6

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

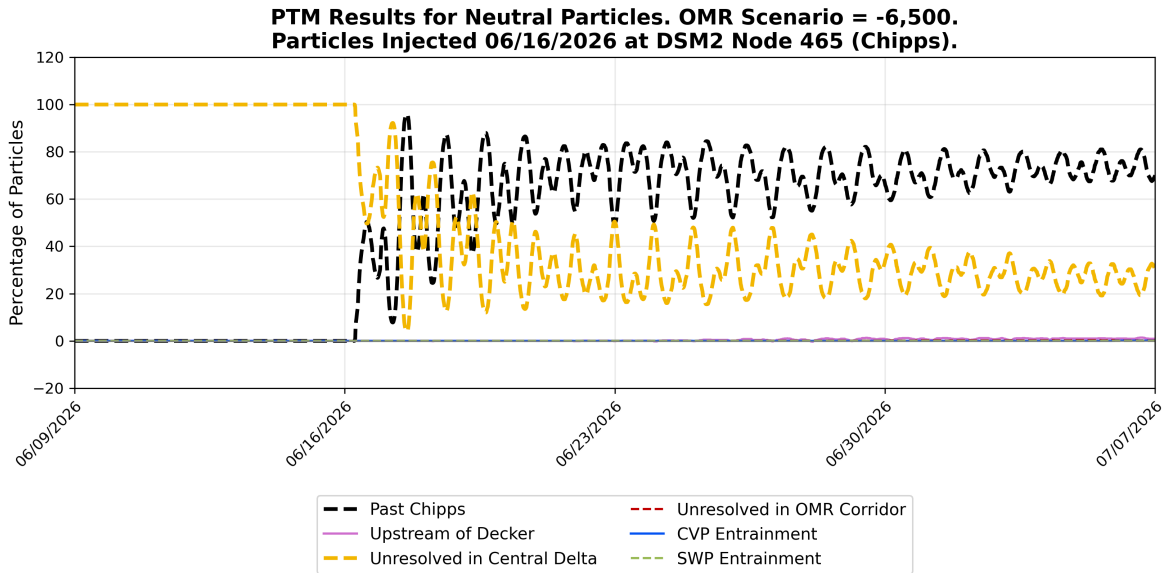


Figure 9: PTM Results for Neutral Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chipps)

Surface Oriented Particles (PP)

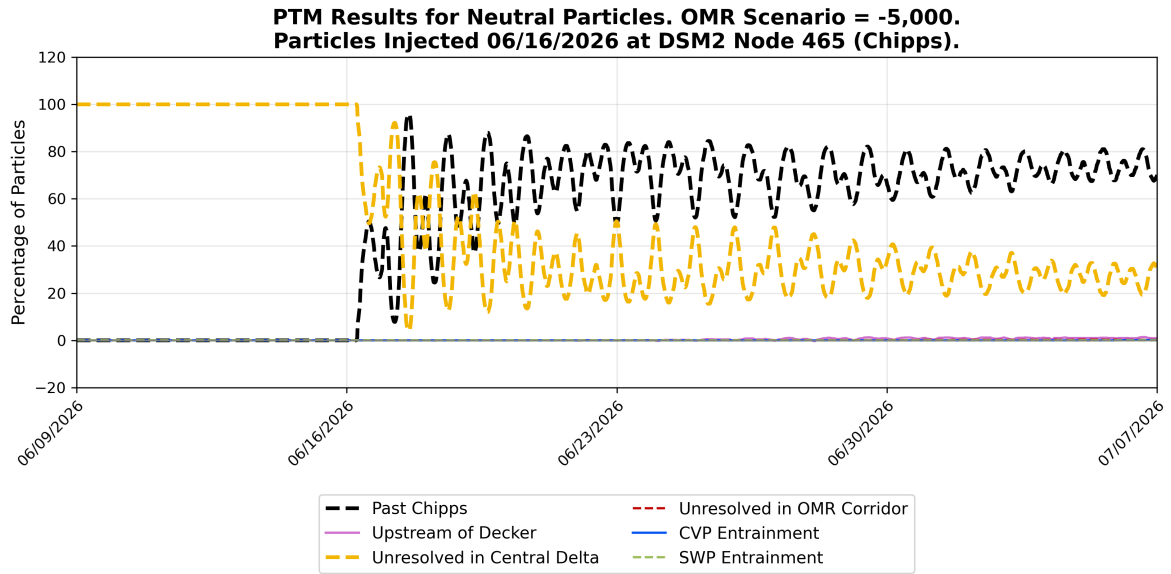


Figure 10: PTM Results for Neutral Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chippes)

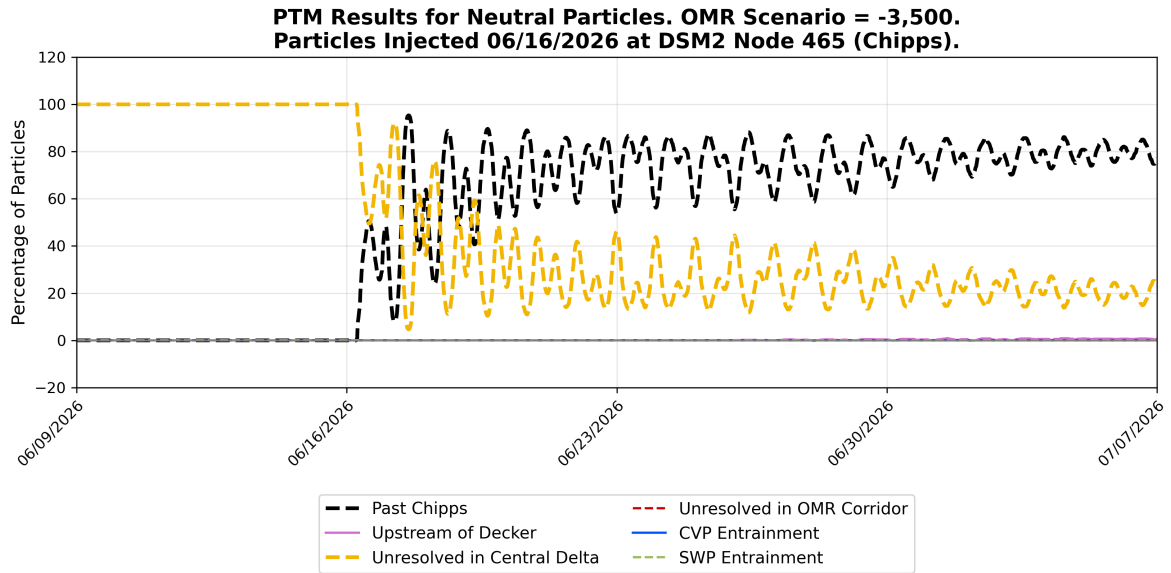


Figure 11: PTM Results for Neutral Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chippes)

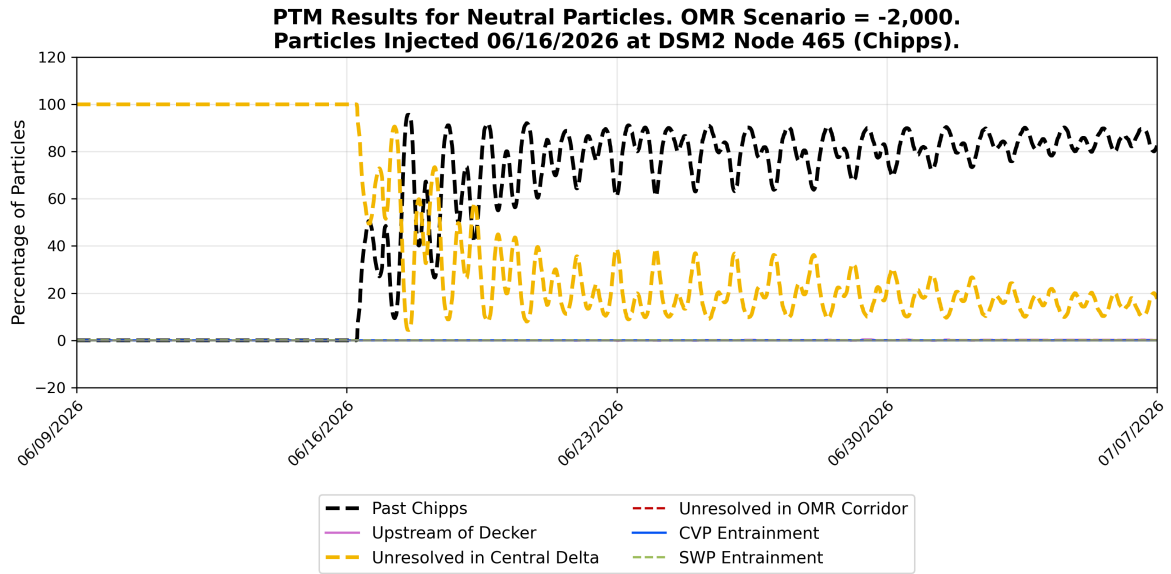


Figure 12: PTM Results for Neutral Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chippis)

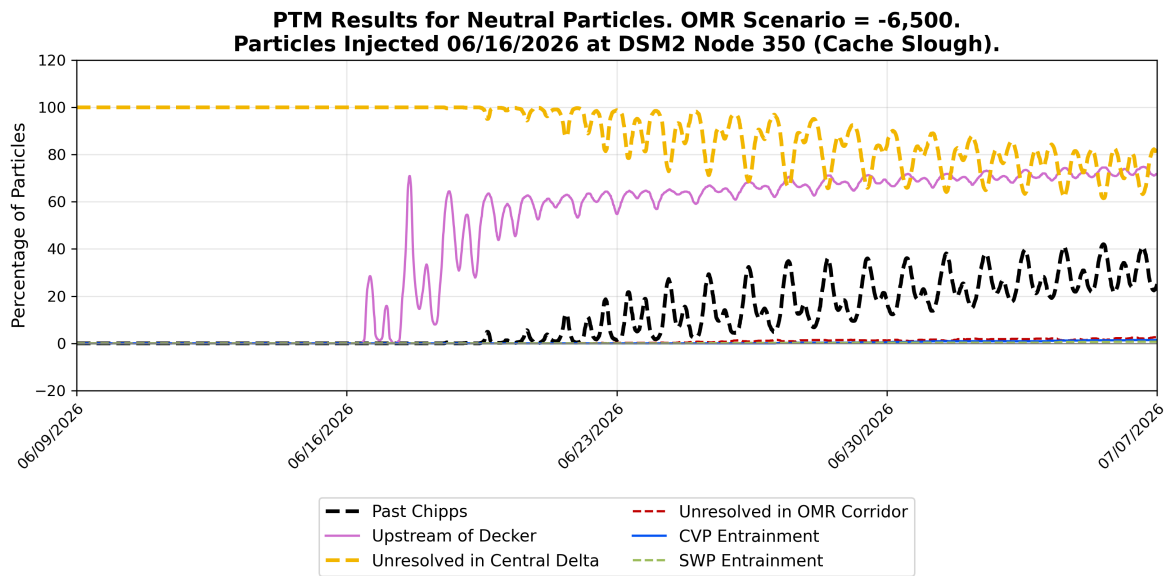


Figure 13: PTM Results for Neutral Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

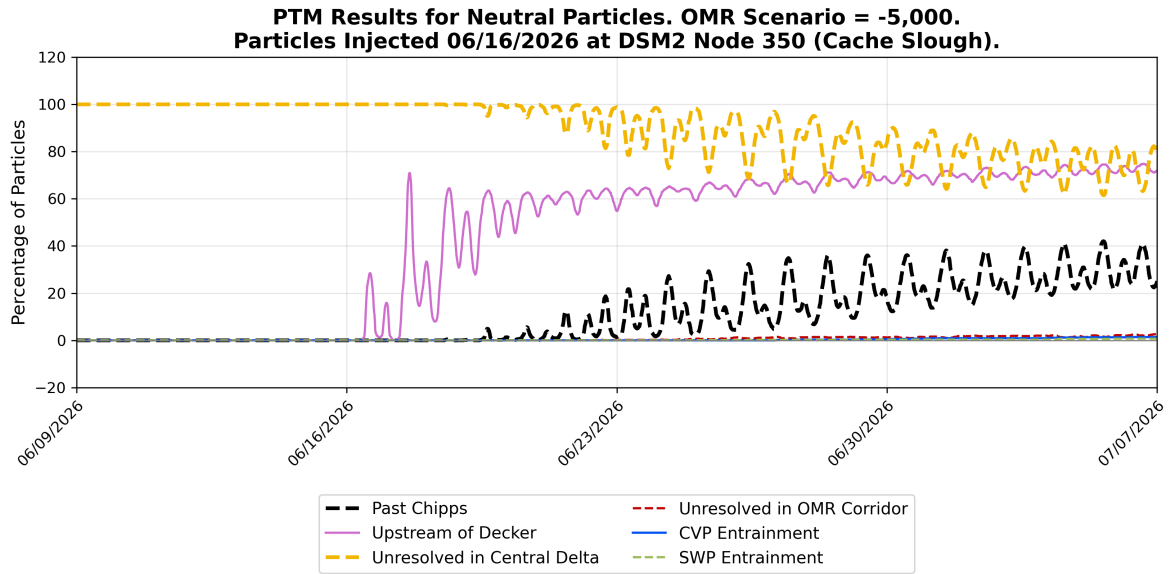


Figure 14: PTM Results for Neutral Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

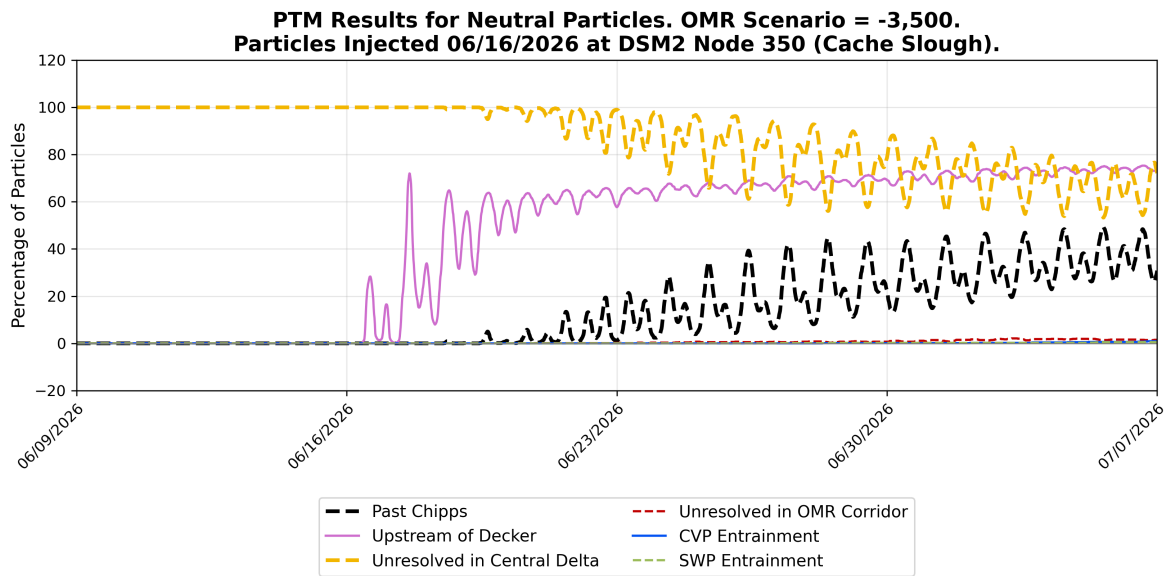


Figure 15: PTM Results for Neutral Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

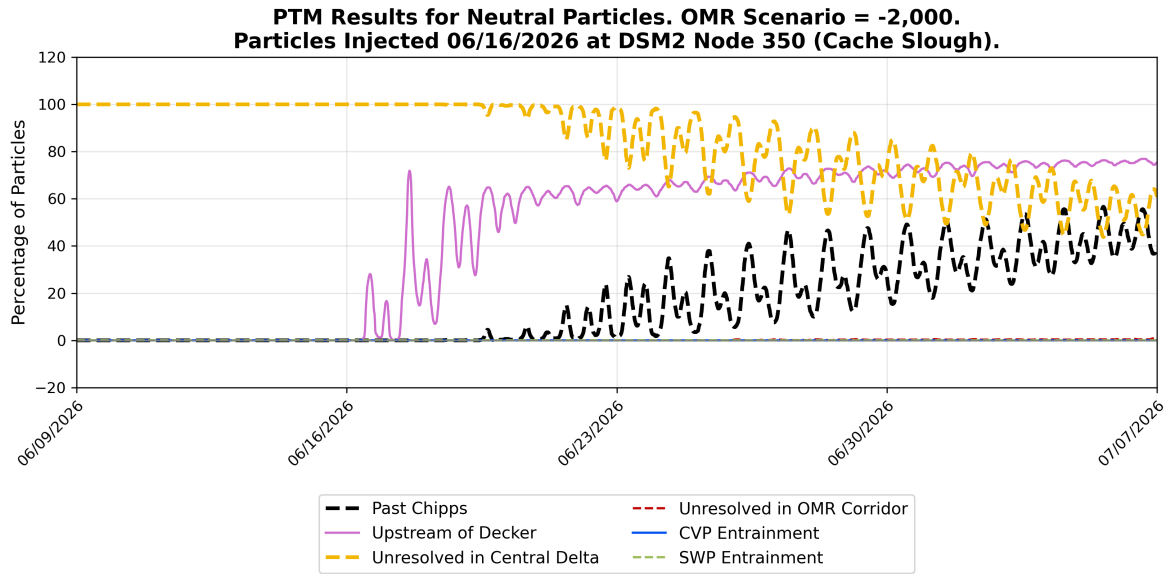


Figure 16: PTM Results for Neutral Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

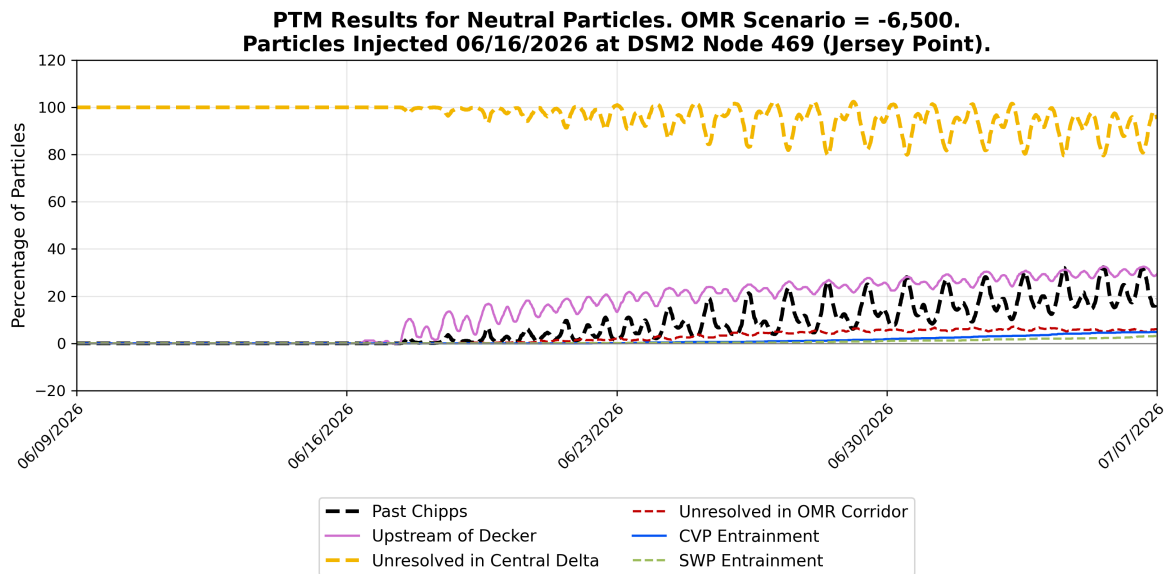


Figure 17: PTM Results for Neutral Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

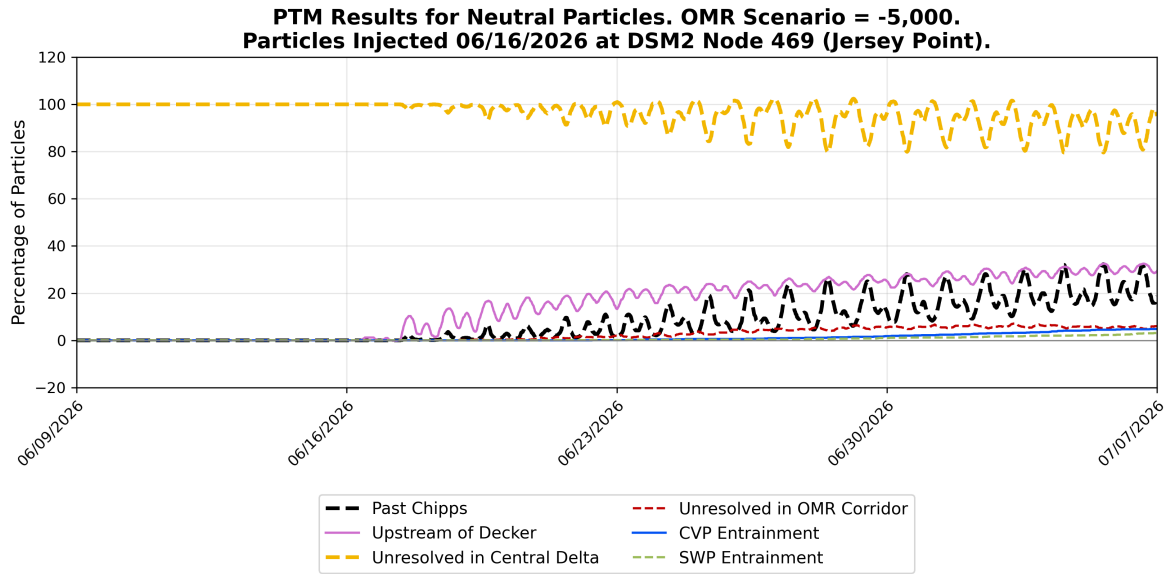


Figure 18: PTM Results for Neutral Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

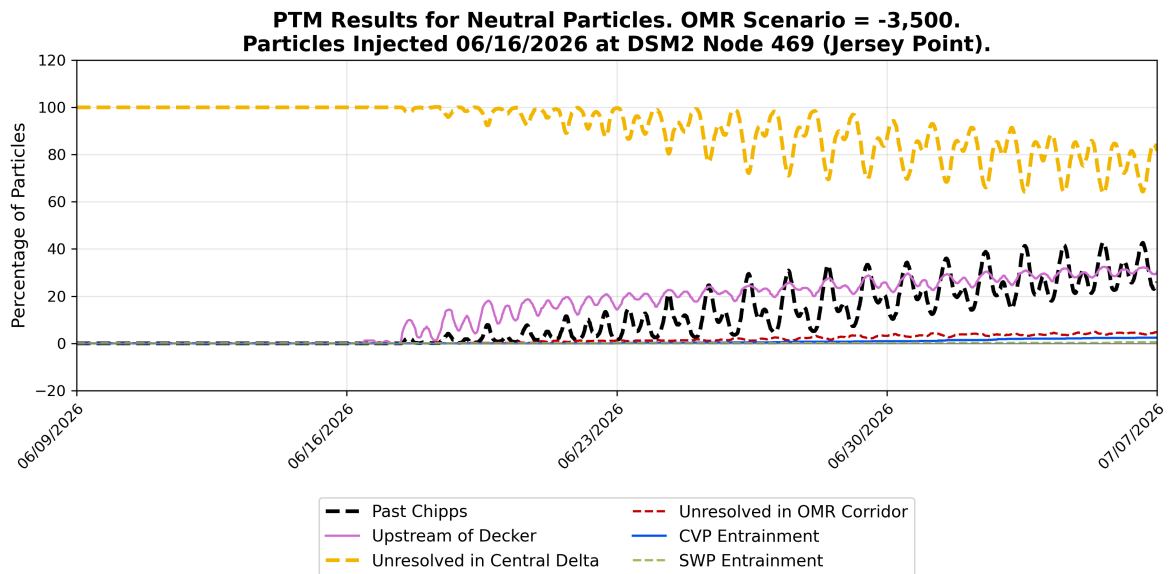


Figure 19: PTM Results for Neutral Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

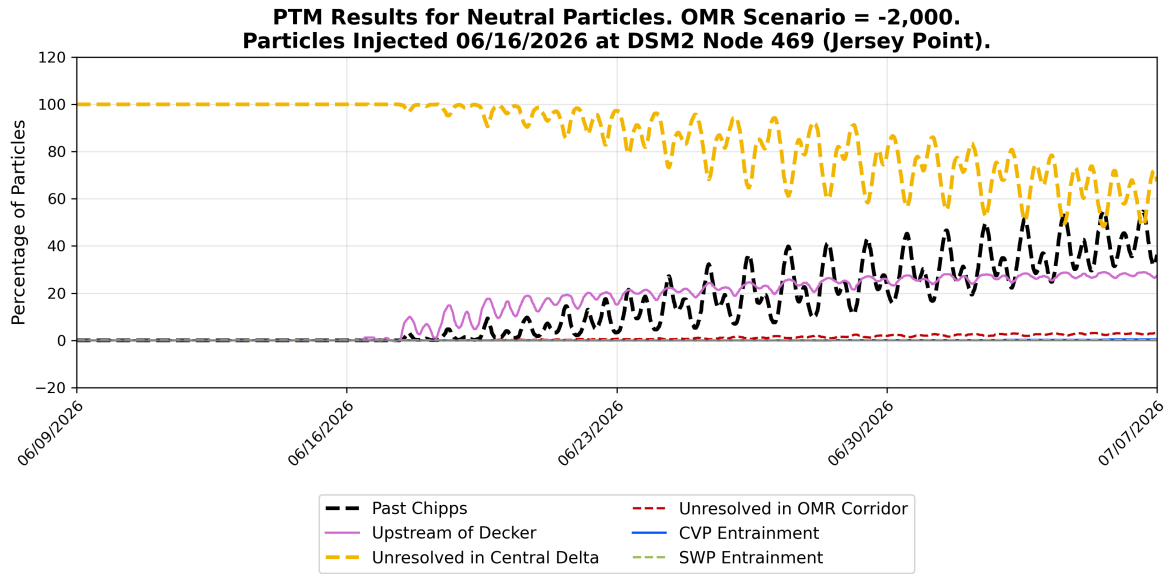


Figure 20: PTM Results for Neutral Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

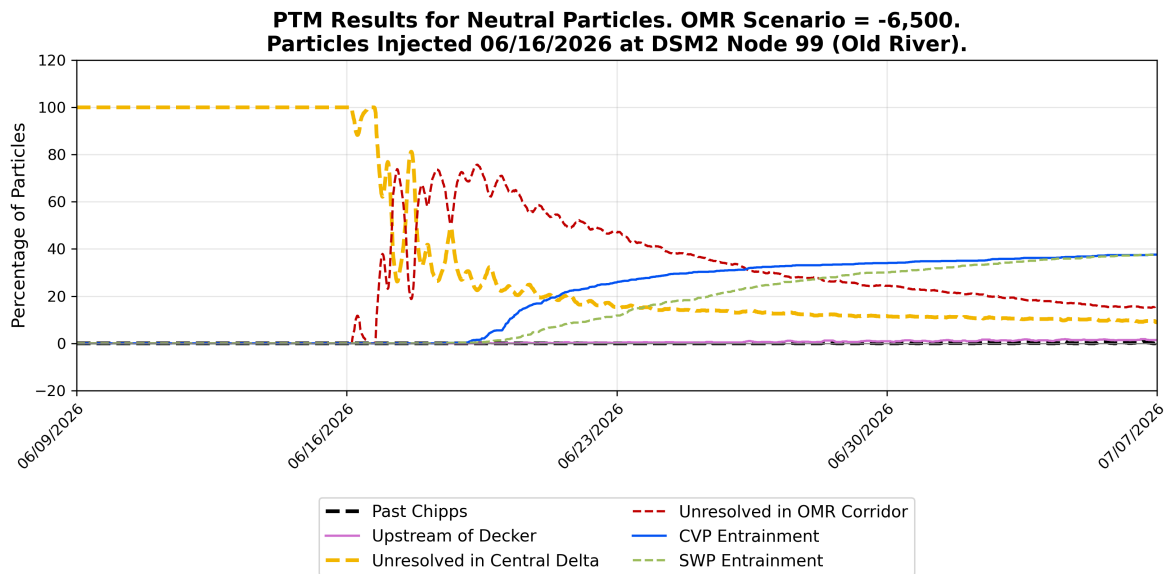


Figure 21: PTM Results for Neutral Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

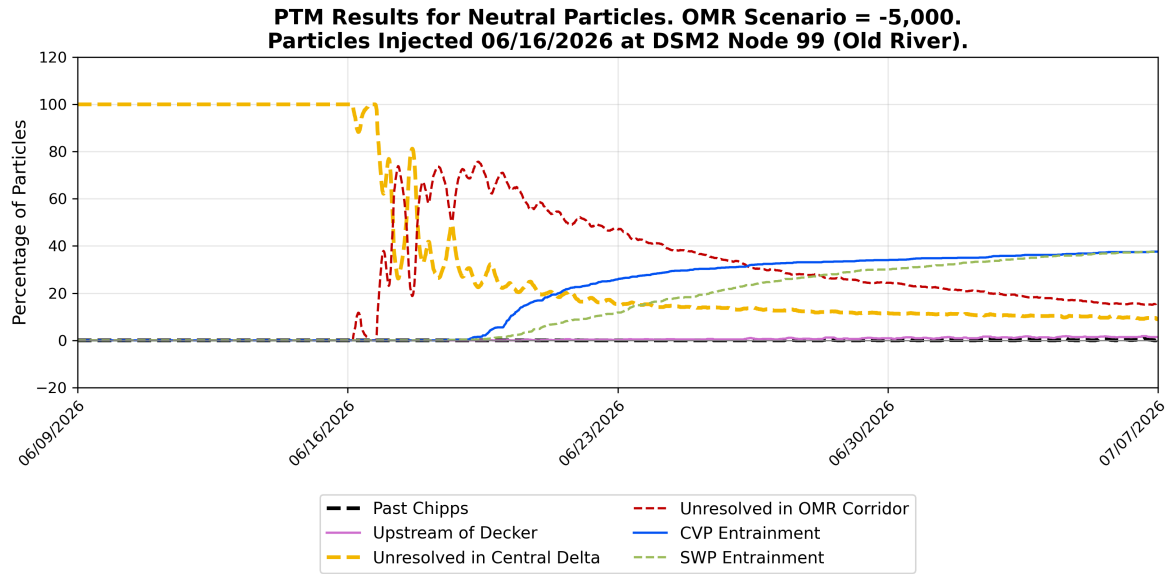


Figure 22: PTM Results for Neutral Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

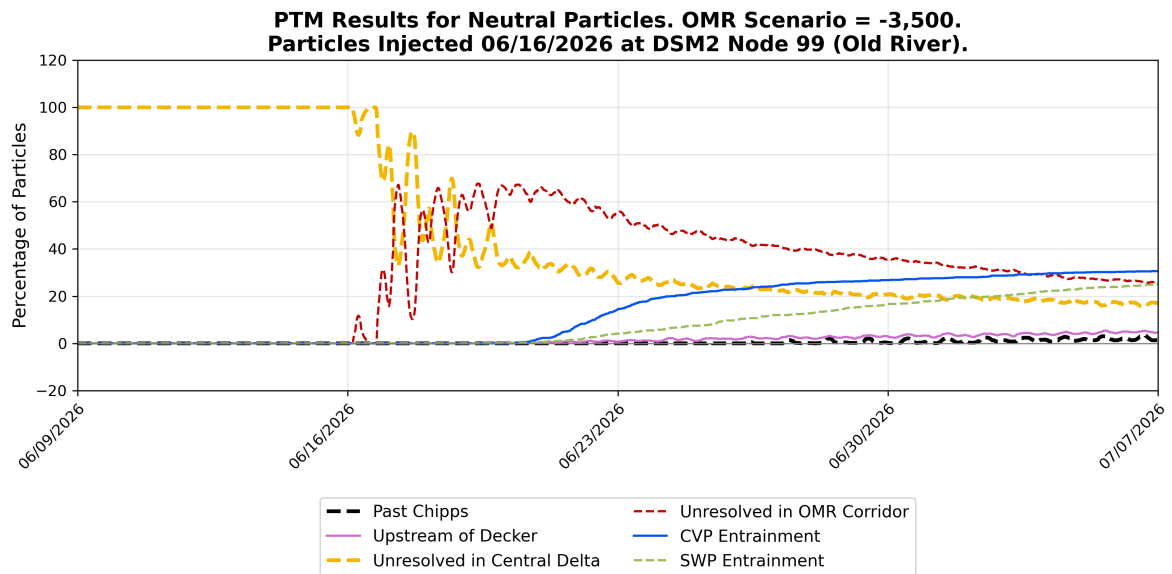


Figure 23: PTM Results for Neutral Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

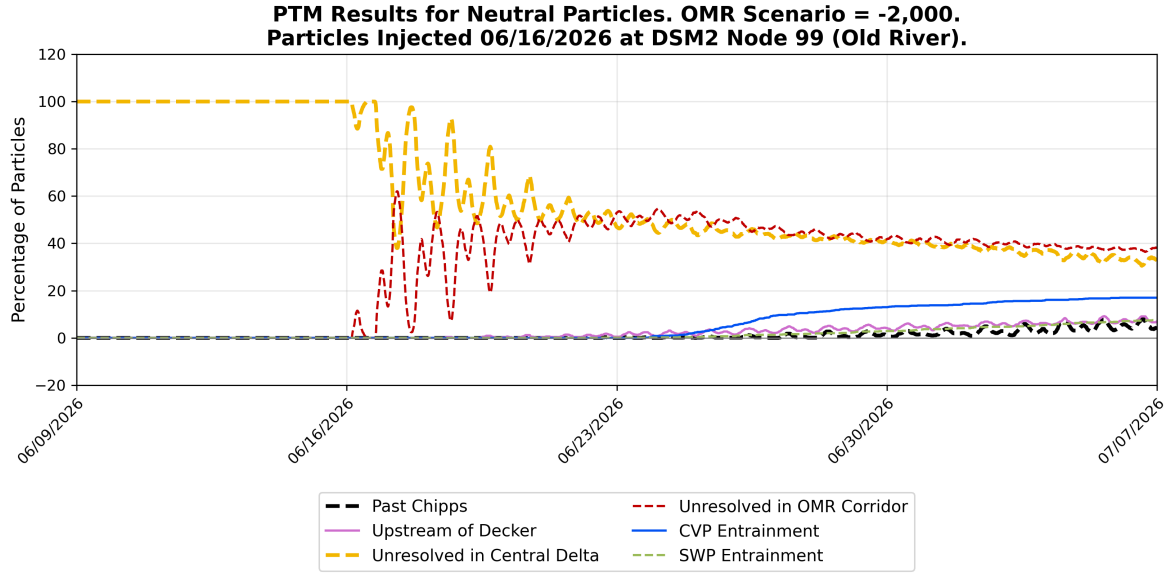


Figure 24: PTM Results for Neutral Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

Table 8: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Chipps (DSM2 Node 465)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	61.9	-0.1	38.1	-0.0	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-5,000	61.9	-0.1	38.1	-0.0	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-3,500	68.3	-0.1	31.7	-0.0	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-2,000	70.6	-0.1	29.4	-0.0	0.0	0.0

Table 8: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Chipps (DSM2 Node 465)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 2: 06/23/2026 – 06/29/2026	-6,500	81.3	0.9	18.7	-0.0	0.0	0.0
Week 2: 06/23/2026 – 06/29/2026	-5,000	81.3	0.9	18.7	-0.0	0.0	0.0
Week 2: 06/23/2026 – 06/29/2026	-3,500	86.8	0.3	13.3	0.1	0.0	0.0
Week 2: 06/23/2026 – 06/29/2026	-2,000	90.4	-0.1	9.6	-0.0	0.0	0.0
Week 3: 06/30/2026 – 07/06/2026	-6,500	84.8	0.6	15.5	0.3	0.0	0.0
Week 3: 06/30/2026 – 07/06/2026	-5,000	84.8	0.6	15.5	0.3	0.0	0.0
Week 3: 06/30/2026 – 07/06/2026	-3,500	90.5	0.5	9.9	0.3	0.0	0.1
Week 3: 06/30/2026 – 07/06/2026	-2,000	93.2	0.0	6.9	0.1	0.0	0.0

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

Table 9: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Cache Slough (DSM2 Node 350)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	4.5	52.6	96.0	0.5	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-5,000	4.5	52.6	96.0	0.5	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-3,500	6.0	55.9	94.5	0.5	0.0	0.0
Week 1: 06/16/2026 – 06/22/2026	-2,000	6.8	54.4	93.4	0.2	0.0	0.0
Week 2: 06/23/2026 – 06/29/2026	-6,500	30.1	65.1	72.8	1.8	0.8	0.3
Week 2: 06/23/2026 – 06/29/2026	-5,000	30.1	65.1	72.8	1.8	0.8	0.3
Week 2: 06/23/2026 – 06/29/2026	-3,500	36.9	68.6	64.6	0.8	0.5	0.2
Week 2: 06/23/2026 – 06/29/2026	-2,000	42.1	65.9	58.6	0.6	0.1	0.0
Week 3: 06/30/2026 – 07/06/2026	-6,500	40.5	69.2	66.0	3.3	2.2	1.0
Week 3: 06/30/2026 – 07/06/2026	-5,000	40.5	69.2	66.0	3.3	2.2	1.0
Week 3: 06/30/2026 – 07/06/2026	-3,500	49.3	71.4	53.9	2.3	0.7	0.2

Table 9: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Cache Slough (DSM2 Node 350)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 3: 06/30/2026 – 07/06/2026	-2,000	54.7	70.2	46.8	1.3	0.1	0.1

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

Table 10: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Jersey Point (DSM2 Node 469)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	5.5	13.3	97.9	2.7	0.4	0.3
Week 1: 06/16/2026 – 06/22/2026	-5,000	5.5	13.3	97.9	2.7	0.4	0.3
Week 1: 06/16/2026 – 06/22/2026	-3,500	6.7	15.1	95.8	2.2	0.1	0.2
Week 1: 06/16/2026 – 06/22/2026	-2,000	9.5	14.6	91.6	1.1	0.0	0.0
Week 2: 06/23/2026 – 06/29/2026	-6,500	24.3	24.0	84.2	4.6	2.8	1.1
Week 2: 06/23/2026 – 06/29/2026	-5,000	24.3	24.0	84.2	4.6	2.8	1.1

Table 10: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Jersey Point (DSM2 Node 469)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 2: 06/23/2026 – 06/29/2026	-3,500	36.3	23.5	69.4	3.7	1.4	0.6
Week 2: 06/23/2026 – 06/29/2026	-2,000	47.2	23.0	54.7	1.4	0.4	0.1
Week 3: 06/30/2026 – 07/06/2026	-6,500	34.0	26.3	80.0	5.2	6.4	2.4
Week 3: 06/30/2026 – 07/06/2026	-5,000	34.0	26.3	80.0	5.2	6.4	2.4
Week 3: 06/30/2026 – 07/06/2026	-3,500	46.5	26.4	62.6	4.5	3.2	1.4
Week 3: 06/30/2026 – 07/06/2026	-2,000	58.8	24.8	44.5	2.6	0.6	0.1

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

Table 11: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Old River (DSM2 Node 99)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-6,500	0.0	0.4	17.7	42.7	27.5	12.1

Table 11: Surface Oriented Particle Fate (percent flux across boundary) for Particles Injected at Old River (DSM2 Node 99)

Forecast Week	OMR Flow Bin (cfs)	Past Chipps	Up-stream of Decker	Unresolved in Central Delta	Unresolved in OMR corridor	CVP En-train-ment	SWP En-train-ment
Week 1: 06/16/2026 – 06/22/2026	-5,000	0.0	0.4	17.7	42.7	27.5	12.1
Week 1: 06/16/2026 – 06/22/2026	-3,500	0.0	0.6	29.6	47.2	17.3	5.9
Week 1: 06/16/2026 – 06/22/2026	-2,000	0.0	0.8	47.4	50.7	1.6	0.3
Week 2: 06/23/2026 – 06/29/2026	-6,500	0.1	1.6	14.2	23.0	34.6	28.1
Week 2: 06/23/2026 – 06/29/2026	-5,000	0.1	1.6	14.2	23.0	34.6	28.1
Week 2: 06/23/2026 – 06/29/2026	-3,500	1.6	3.0	22.4	31.6	26.0	18.4
Week 2: 06/23/2026 – 06/29/2026	-2,000	2.9	6.1	39.0	41.5	12.3	4.3
Week 3: 06/30/2026 – 07/06/2026	-6,500	1.4	2.6	11.0	15.3	37.8	34.5
Week 3: 06/30/2026 – 07/06/2026	-5,000	1.4	2.6	11.0	15.3	37.8	34.5
Week 3: 06/30/2026 – 07/06/2026	-3,500	4.2	4.8	16.1	23.2	29.8	26.7
Week 3: 06/30/2026 – 07/06/2026	-2,000	9.2	8.2	29.8	34.9	16.1	10.0

Note: Values between 0.0 and 0.1 are indicated with <0.1.

Key: CVP = Central Valley Project, OMR = Old and Middle River, SWP = State Water Project

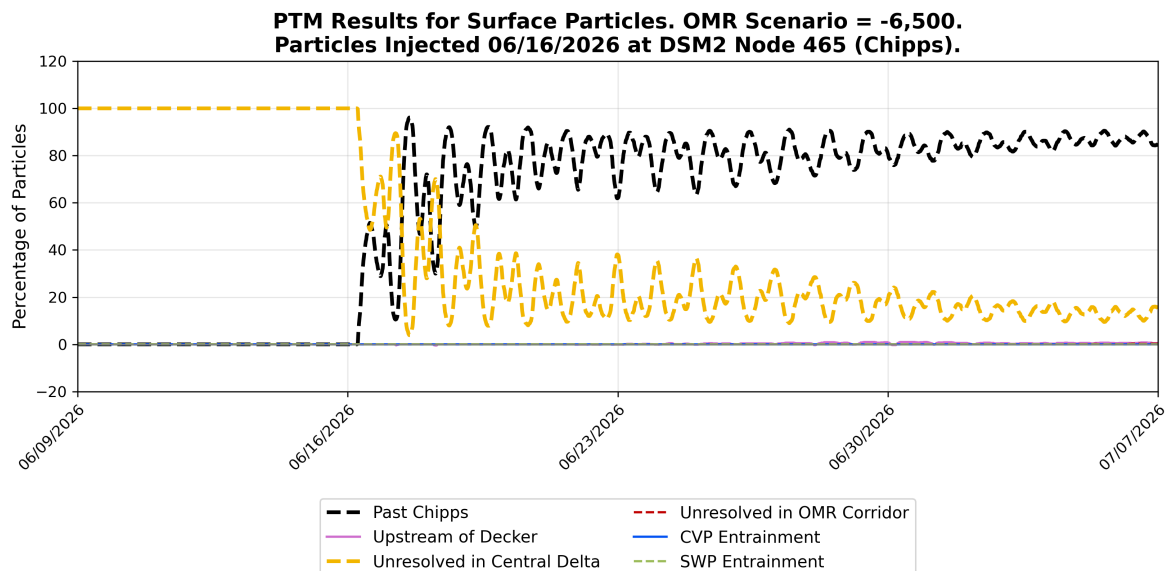


Figure 25: PTM Results for Surface Oriented Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chippis)

ECO-PTM (Ecological Particle Tracking Model)

ECO-PTM Results Evaluation Period: 06/16/2026 – 07/06/2026

Particles Injected: 06/16/2026

Injection Location: Sacramento River at Freeport

Table 12: Salmon Particle Route Ratio After 3 Weeks Ending 07/06/2026

-5,000	0.09	0.07	0.83	0.73	0.25
-3,500	0.10	0.07	0.83	0.74	0.25
-2,000	0.10	0.07	0.83	0.71	0.28

Note: Salmon particle route ratio for the Sacramento River (SS) Route reflects particles inserted at Freeport that are not routed through either Sutter Slough or Steamboat Slough. Salmon particle route ratio for the Sacramento River (GEO) Route reflects particles inserted

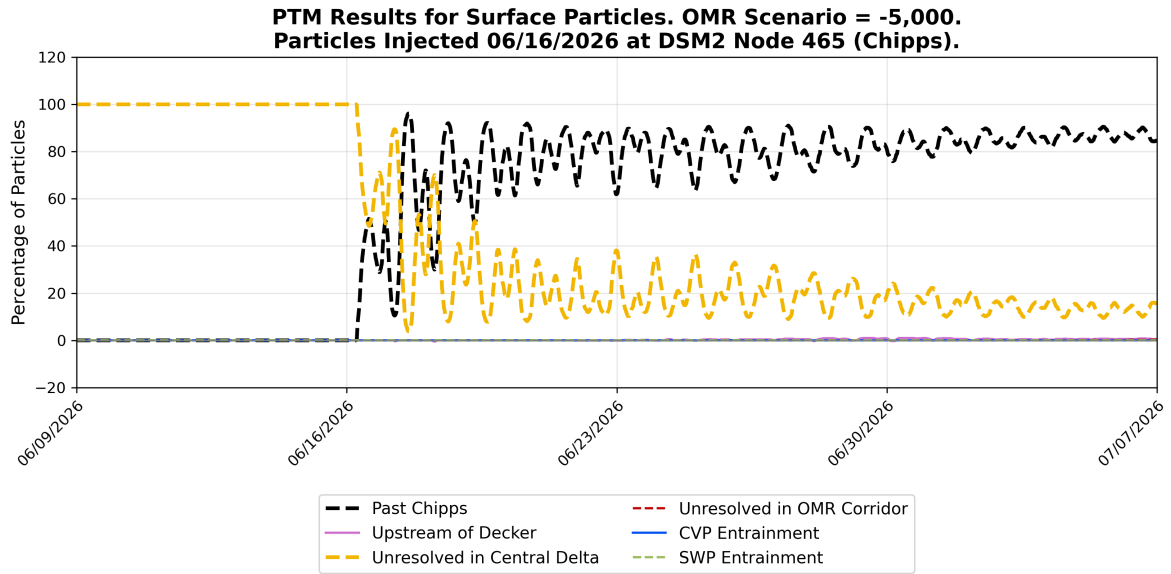


Figure 26: PTM Results for Surface Oriented Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chippis)

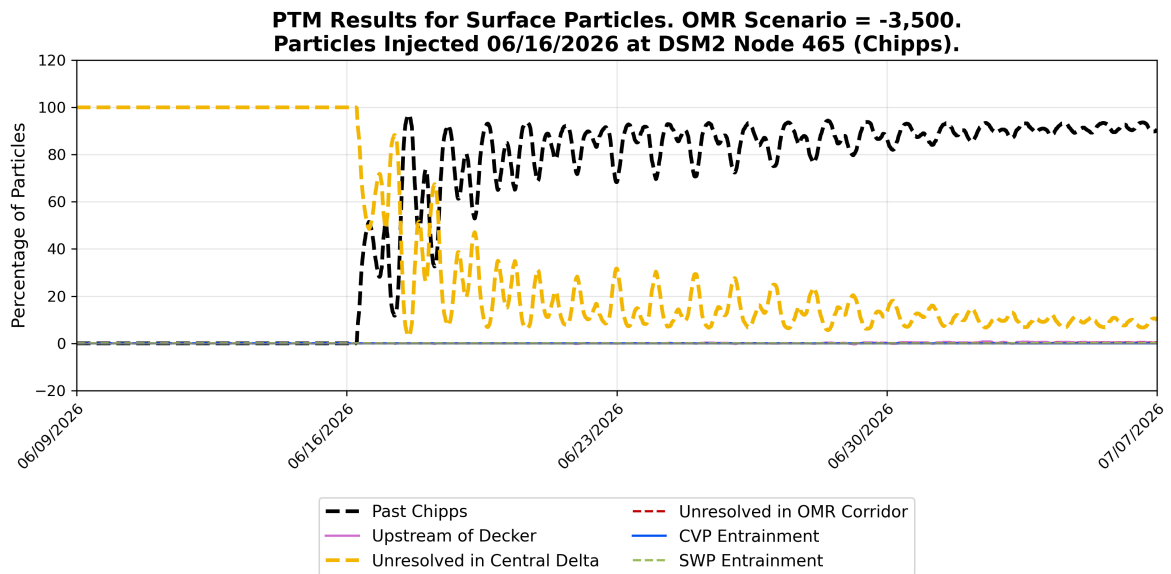


Figure 27: PTM Results for Surface Oriented Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chippis)

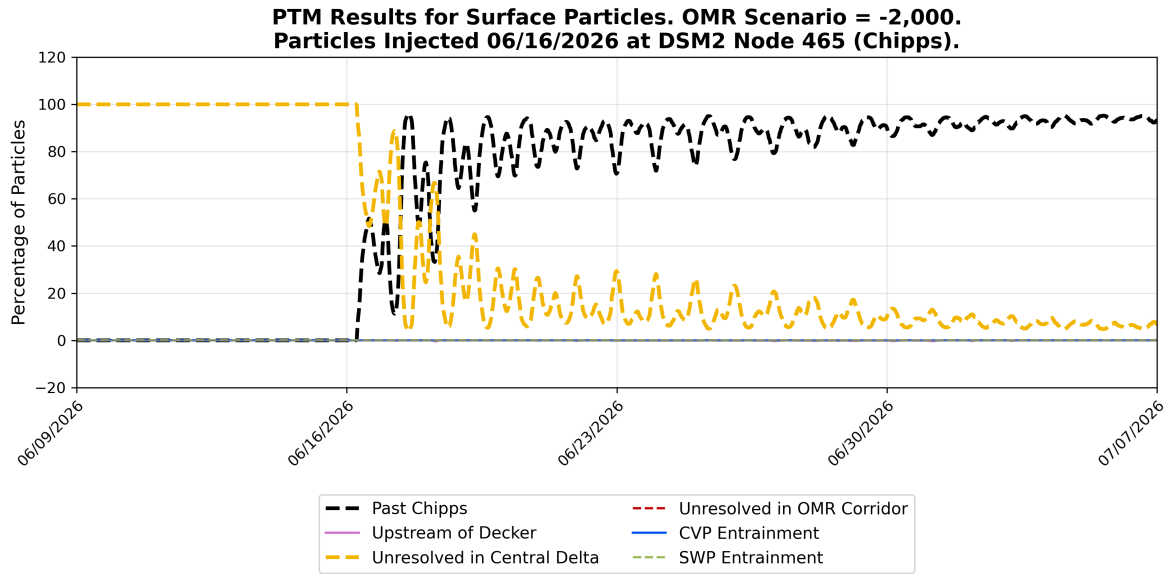


Figure 28: PTM Results for Surface Oriented Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 465 (Chipps)

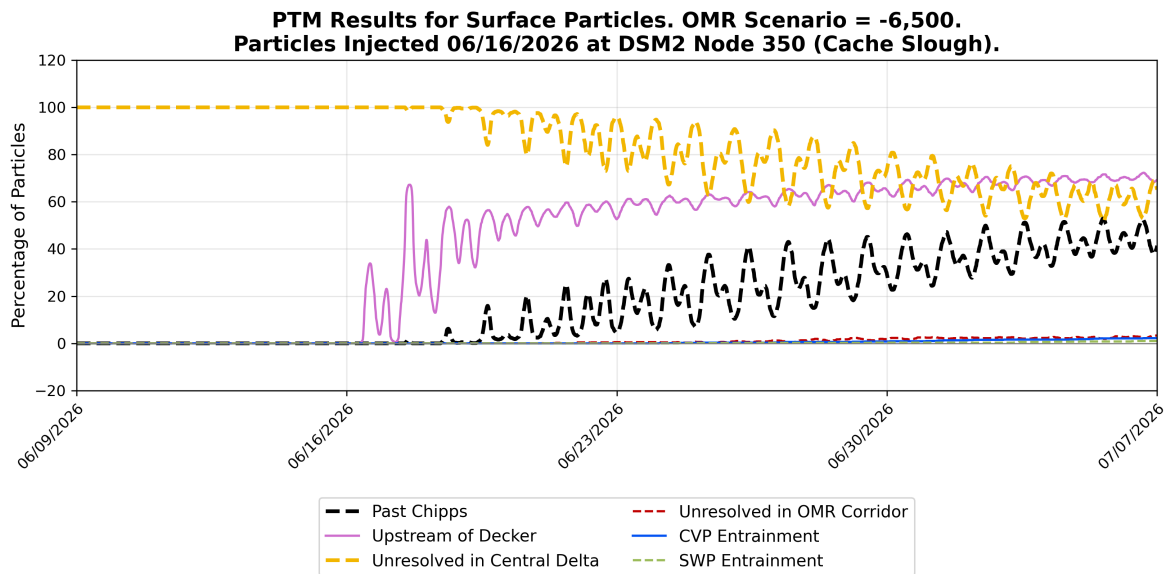


Figure 29: PTM Results for Surface Oriented Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

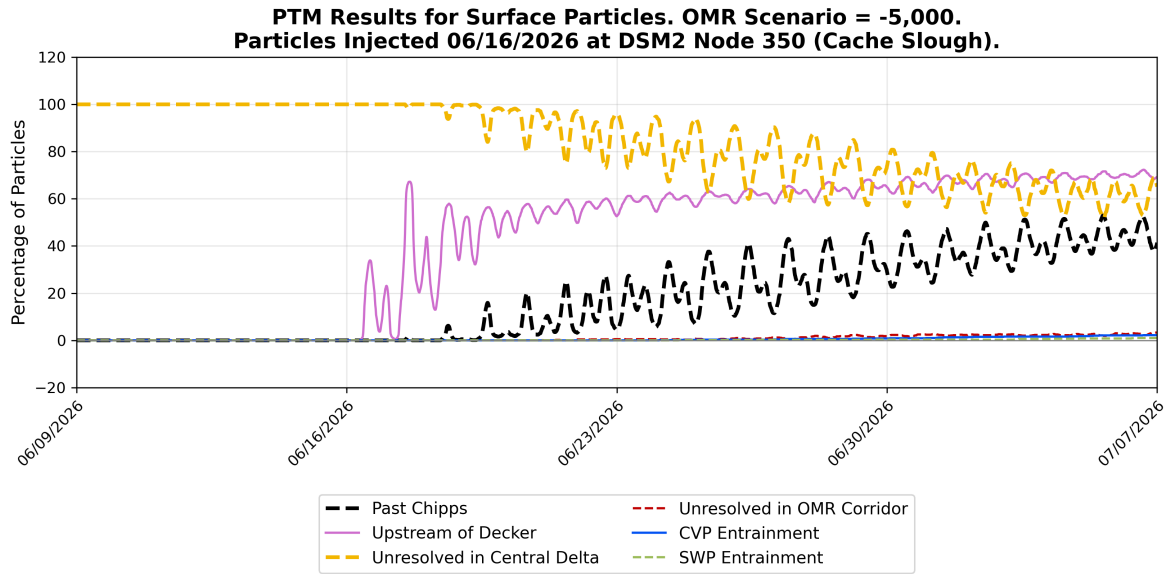


Figure 30: PTM Results for Surface Oriented Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

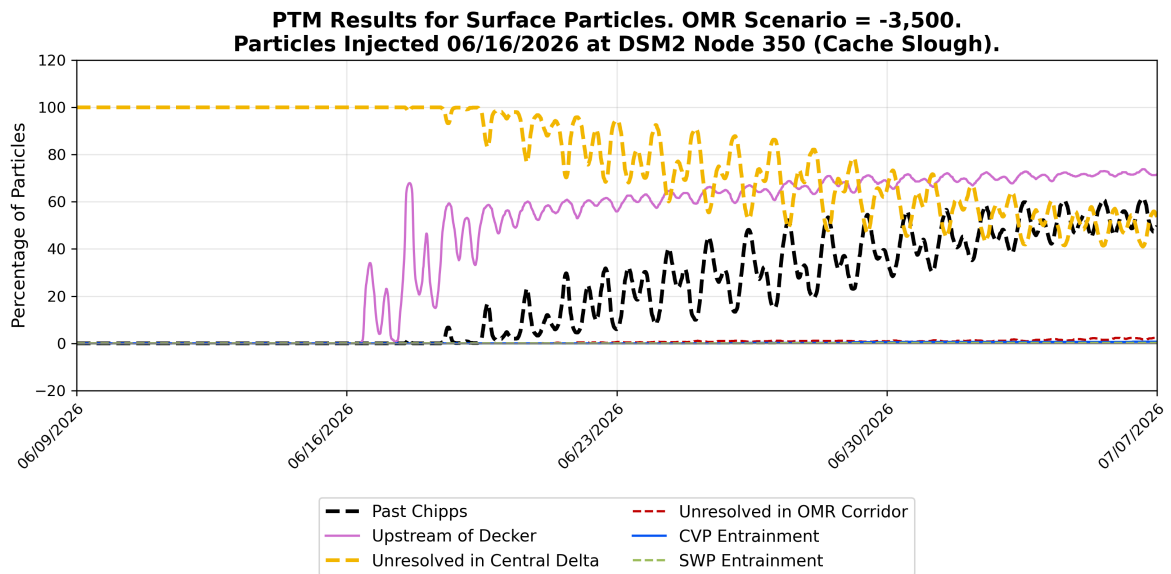


Figure 31: PTM Results for Surface Oriented Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

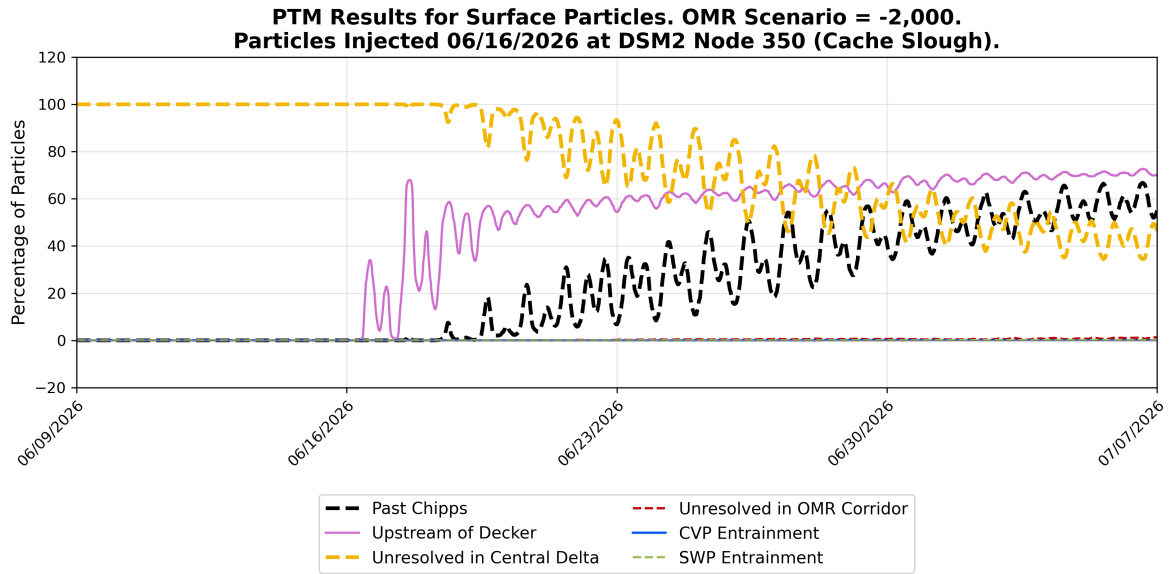


Figure 32: PTM Results for Surface Oriented Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 350 (Cache Slough)

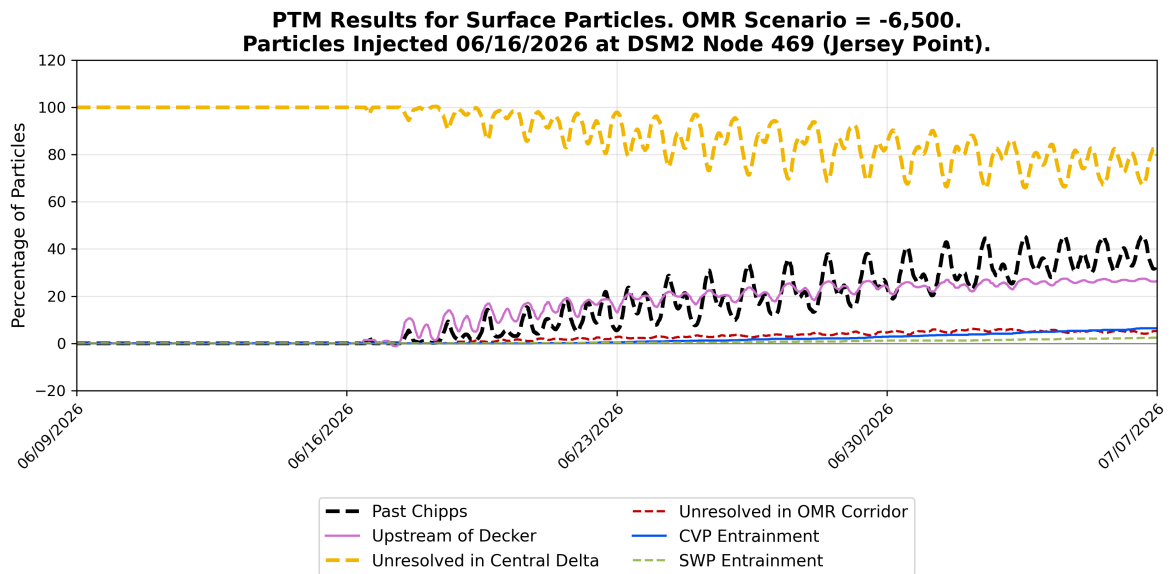


Figure 33: PTM Results for Surface Oriented Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

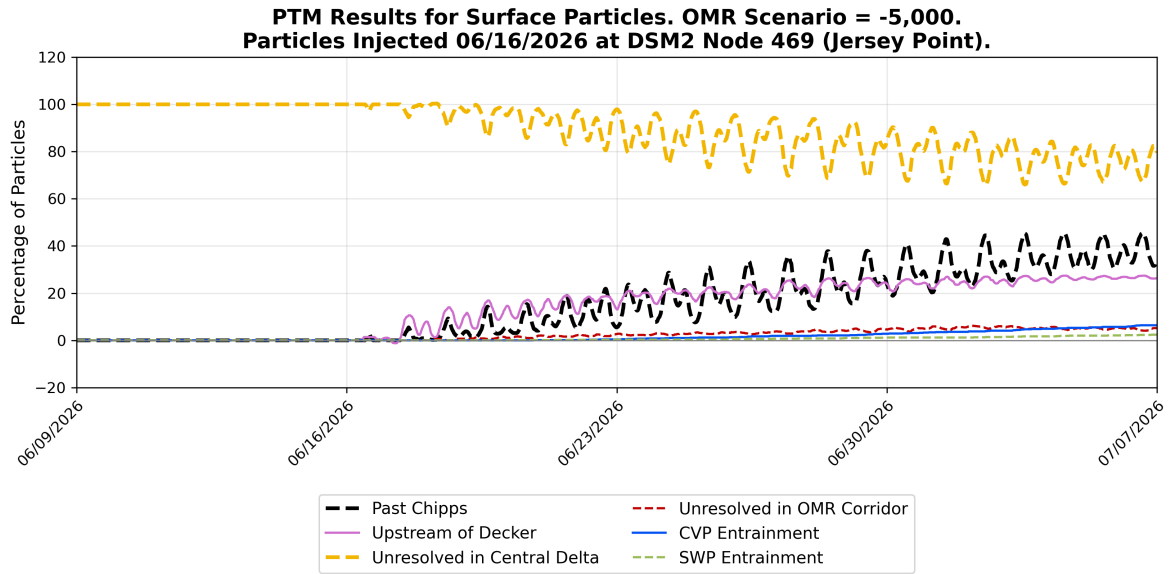


Figure 34: PTM Results for Surface Oriented Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

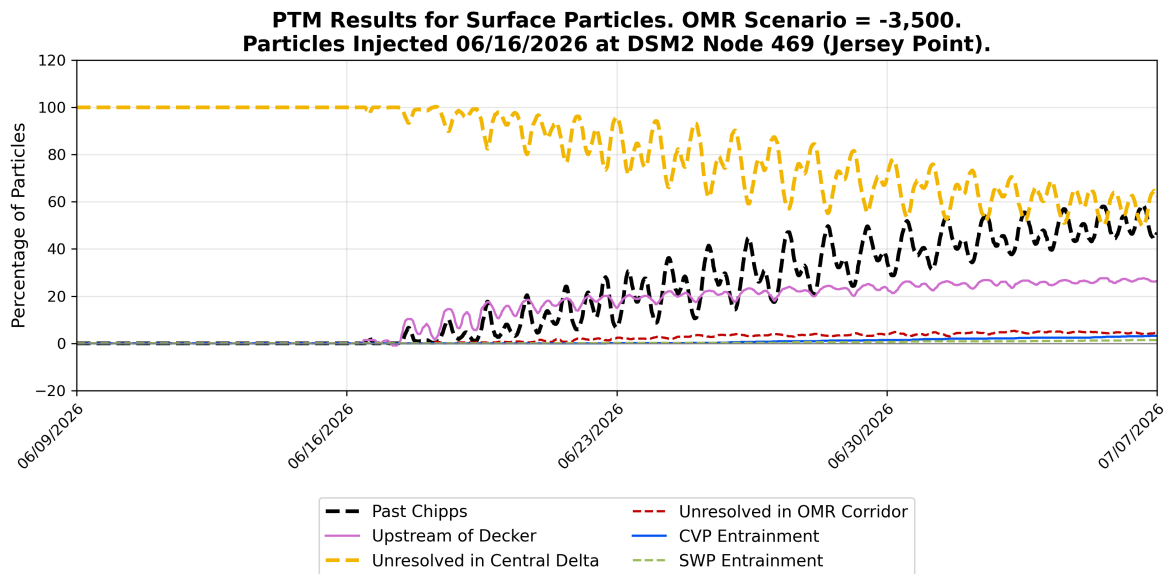


Figure 35: PTM Results for Surface Oriented Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

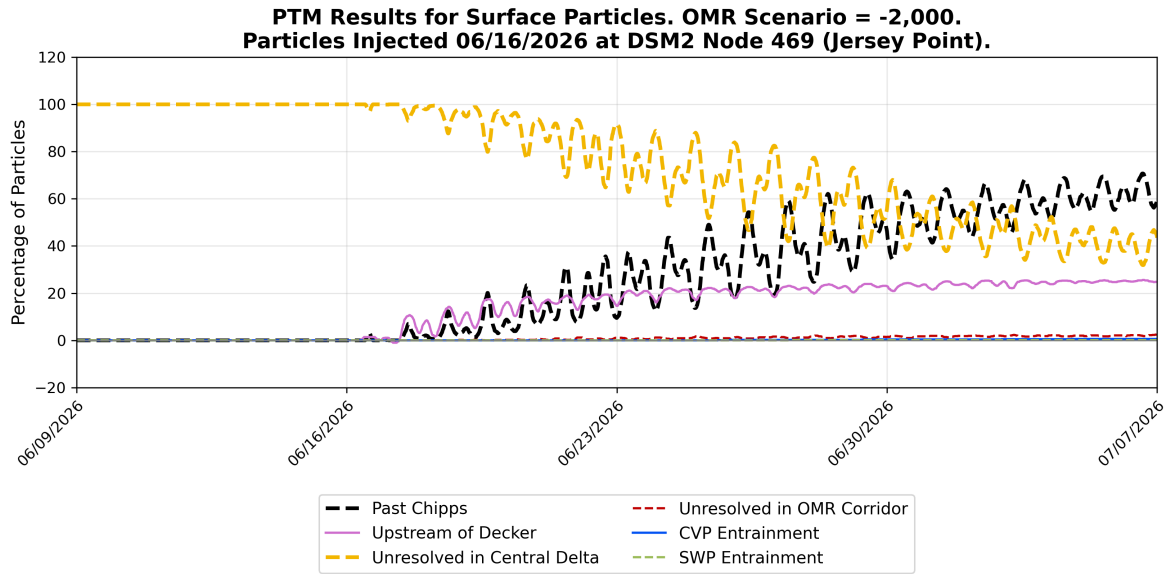


Figure 36: PTM Results for Surface Oriented Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 469 (Jersey Point)

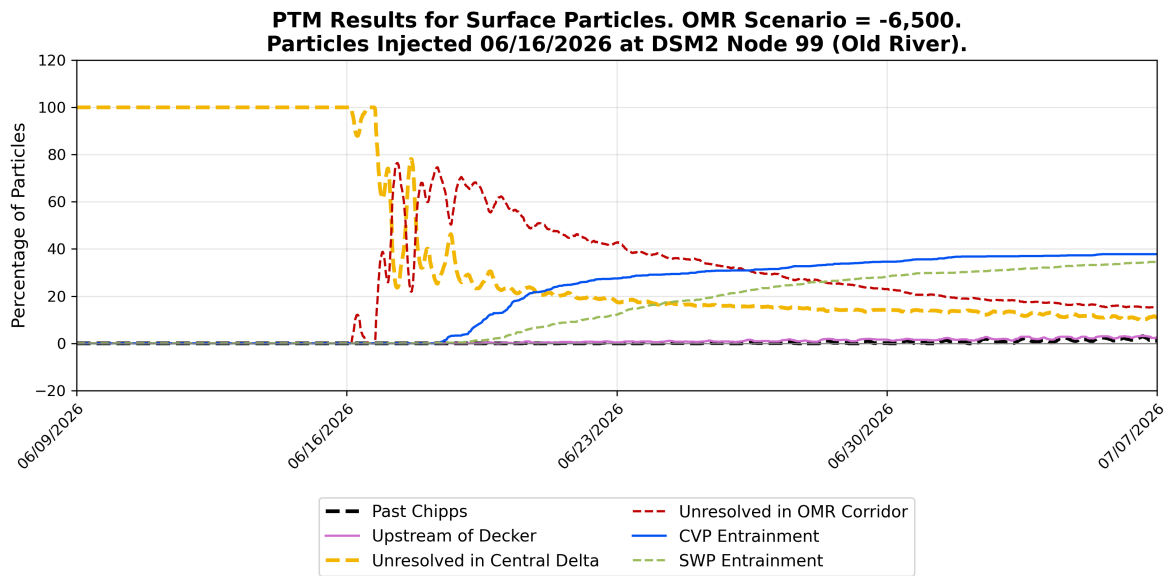


Figure 37: PTM Results for Surface Oriented Particles. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

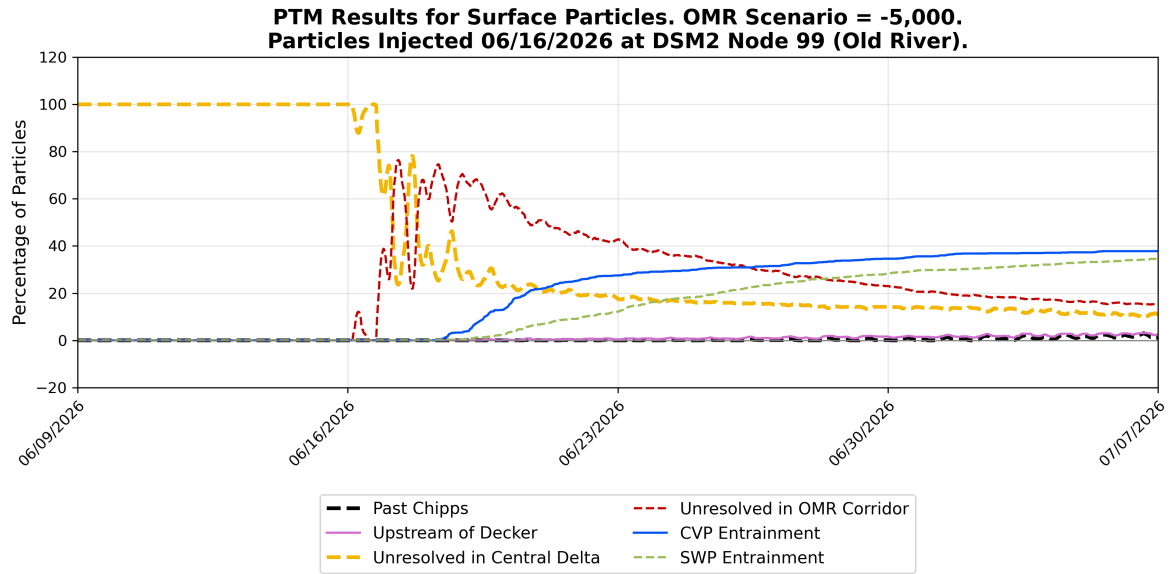


Figure 38: PTM Results for Surface Oriented Particles. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

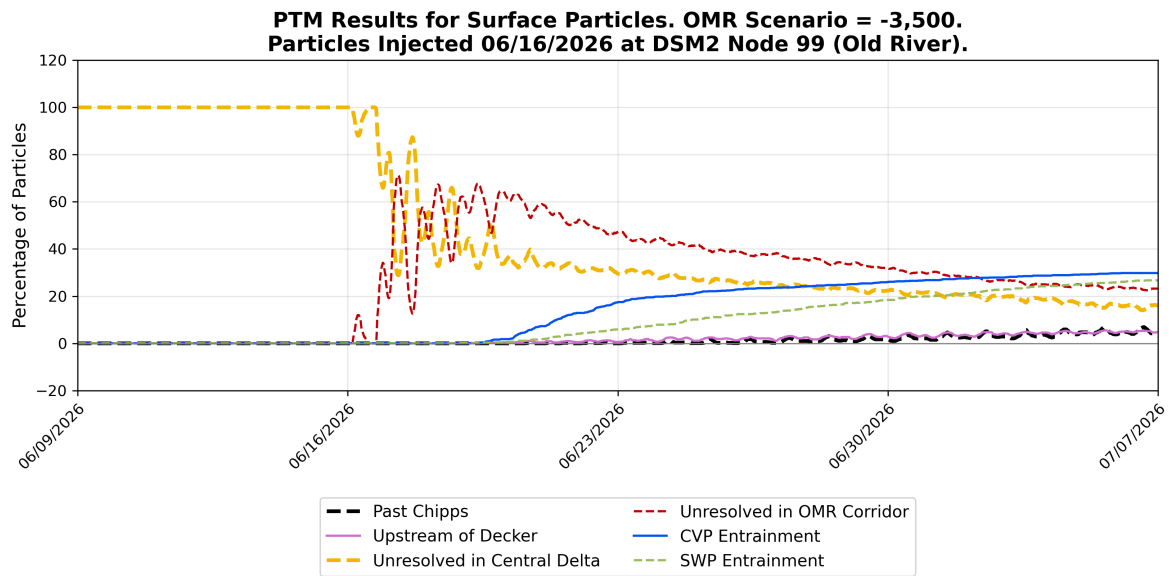


Figure 39: PTM Results for Surface Oriented Particles. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

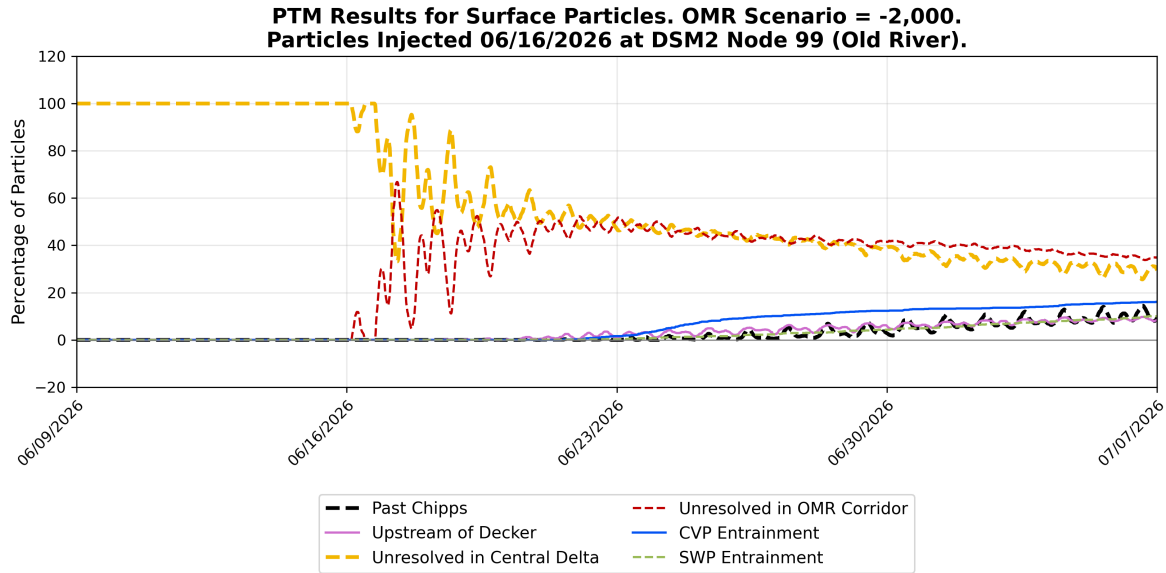


Figure 40: PTM Results for Surface Oriented Particles. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026 at DSM2 Node 99 (Old River)

at Freeport that are not routed through either Sutter Slough, Steamboat Slough, Georgiana Slough, or the Delta Cross Channel when operational.

Key: cfs = cubic feet per second, OMR = Old and Middle River

Table 13: Salmon Particle Route-Specific Survival After 3 Weeks Ending 07/06/2026

-5,000	40%	52%	46%	29%	41%
-3,500	35%	53%	45%	25%	40%
-2,000	37%	52%	45%	28%	40%

Key: cfs = cubic feet per second, OMR = Old and Middle River

Longfin Smelt Larval Population and PTM Analysis

PTM Results Evaluation Period: 06/16/2026 – 07/06/2026

Particles Injected: 06/16/2026

PTM Injection Location: Node(s) within each Delta Region identified in the maps below.

PTM Analysis Method: LFS larva abundance is estimated in each Enhanced Delta Smelt Monitoring (EDSM) program subregion. Cumulative particle flux into CVP and SWP facilities is represented in PTM by one injection location per subregion. LFS larva entrainment is estimated by multiplying the LFS subregion abundance by cumulative particle flux into CVP and SWP facilities from the corresponding subregion injection point. LFS entrainment from each subregion is added together and reported at the LFS Region scale.

Note: No DSM2 nodes are west of the West Suisun Bay subregion, so the furthest west node in the DSM2 domain is used to represent particle entrainment for all subregions west of West Suisun Bay.

Table 14: Percent of Smelt Larva Survey Sample Results Processed

1	12/29/2025	100%	100%	100%	100%	100%	100%	100%
2	1/12/2026	100%	100%	100%	100%	100%	100%	100%
3	1/26/2026	100%	100%	100%	100%	100%	100%	100%
4	2/9/2026	100%	100%	100%	100%	100%	100%	100%
5	2/23/2026	100%	100%	100%	100%	100%	100%	100%
6	3/9/2026	100%	100%	100%	100%	100%	100%	100%

Key: SLS = Smelt Larva Survey

The DSM2 node used as an injection point, EDSM subregion, and LFS Region for reporting are shown in the following table.

Table 15: DSM2 Injection Node, EDSM Subregion, and LFS Region

329	East Suisun Bay	Suisun
365	Grizzly Bay	Suisun
227	Honker Bay	Suisun
420	Montezuma Slough	Suisun
359	West Suisun Bay	Suisun
359	Carquinez Strait	Western Delta
359	Upper Napa River	Western Delta
359	Lower Napa River	Western Delta
359	East San Pablo Bay	Western Delta
359	West San Pablo Bay	Western Delta
359	Mid San Pablo Bay	Western Delta
353	Lower Sacramento River	Lower Sacramento
351	Sacramento River near Rio Vista	Lower Sacramento
350	Lower Sacramento River Ship Channel	Sacramento/ North Delta
293	Sacramento River near Ryde	Sacramento/ North Delta
323	Cache Slough and Liberty Island	Sacramento/ North Delta

Table 15: DSM2 Injection Node, EDSM Subregion, and LFS Region

304	Upper Sacramento River	Sacramento/ North Delta
249	North and South Forks Mokelumne River	East
46	Lower San Joaquin River	Lower San Joaquin
41	San Joaquin River at Twitchell Island	Lower San Joaquin
34	San Joaquin River at Prisoners Point	Lower San Joaquin
225	Franks Tract	South Delta
99	Holland Cut	South Delta
86	Old River	South Delta
29	San Joaquin River near Stockton	South Delta
145	Middle River	South Delta
75	Victoria Canal	South Delta

Table 16: LFS Entrainment Estimate Using PTM with Surface Oriented Particles: Week 1 Ending 06/22/2026

	DSM2	359	359,329	365,350	227,323	304,485	352,861	45,752	99,225	NA	NA
	Nodes										
	LFS	117633	68756	77478	304865	407873	9695676	0	0	271390	NA
	Abundance										
	(Grouped)										
- 5,166	PTM (%)	0	0	0.2	1.2	0	43.6	0.2	45.2	NA	
5,000											
- 3,563	PTM (%)	0	0	0.1	0.2	0	33.7	0	34	NA	
3,500											
- 1,875	PTM (%)	0	0	0	0	0	16.7	0	16.7	NA	
2,000											
- 5,166	Entrained	0	0	0	20763.2	0	0	0	20763	0.01	
5,000	(#)										
- 3,563	Entrained	0	0	0	2589.7	0	0	0	2590	0	
3,500	(#)										
- 1,875	Entrained	0	0	0	0	0	0	0	0	0	
2,000	(#)										

Notes: Values between 0.0 and 0.1 are indicated with <0.1.

The PTM entrained (%) value reflects the total entrained particles from all subregions within an LFS Region divided by the estimated LFS Region abundance.

Key: cfs = cubic feet per second, LFS = Longfin Smelt, OMR = Old and Middle River

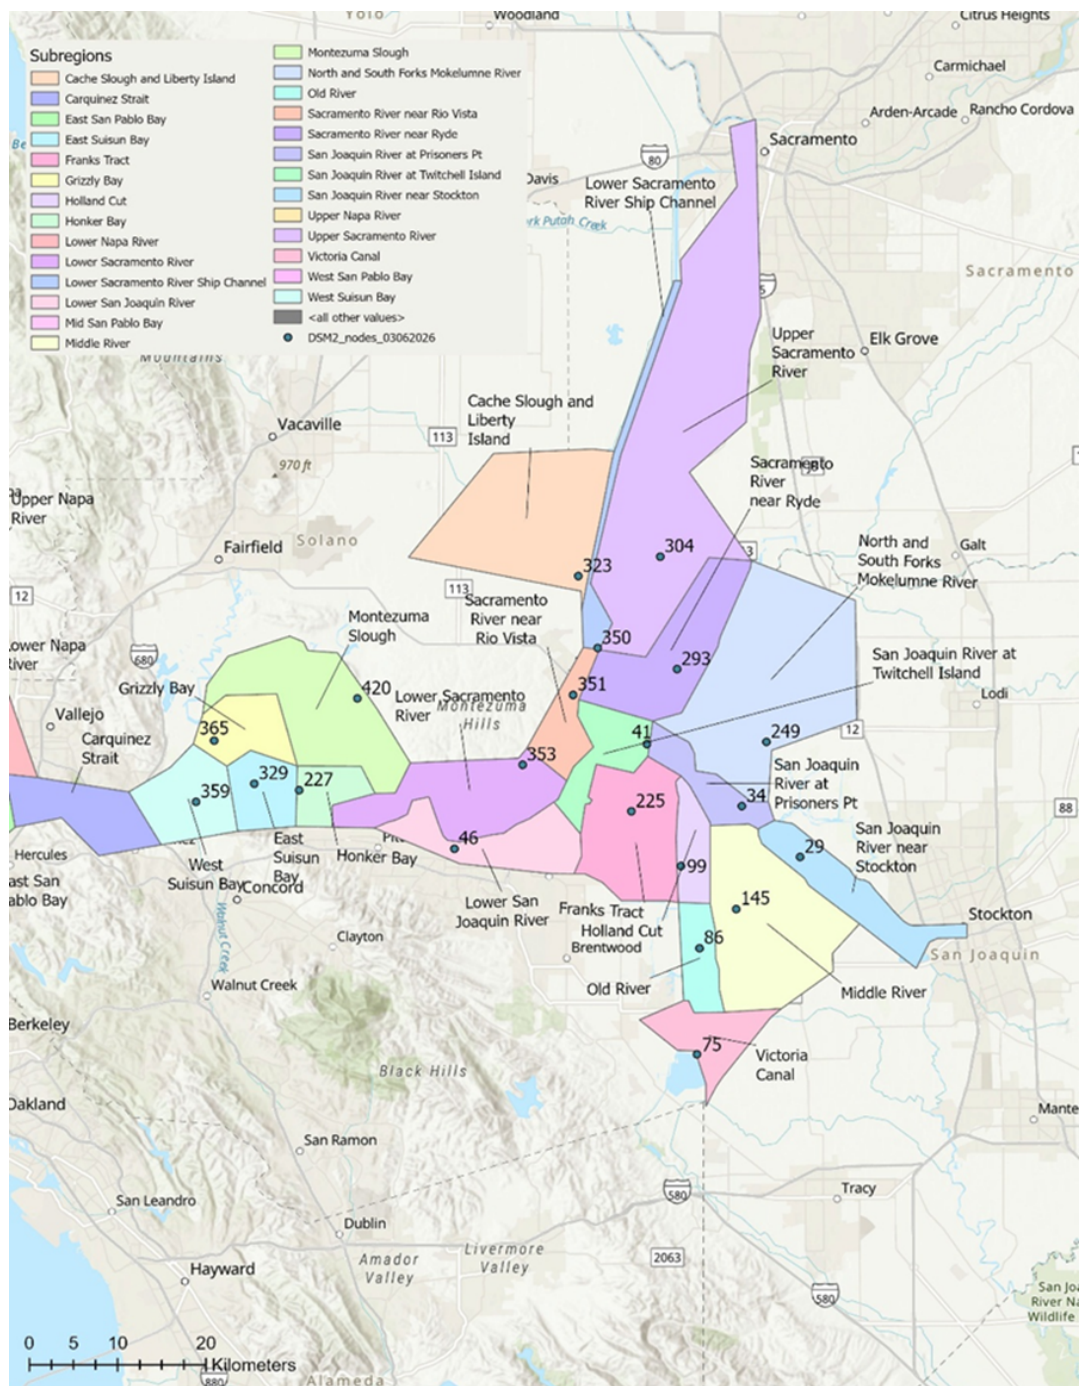


Figure 41: Map of Delta Showing Longfin Smelt Subregions and DSM2 Nodes

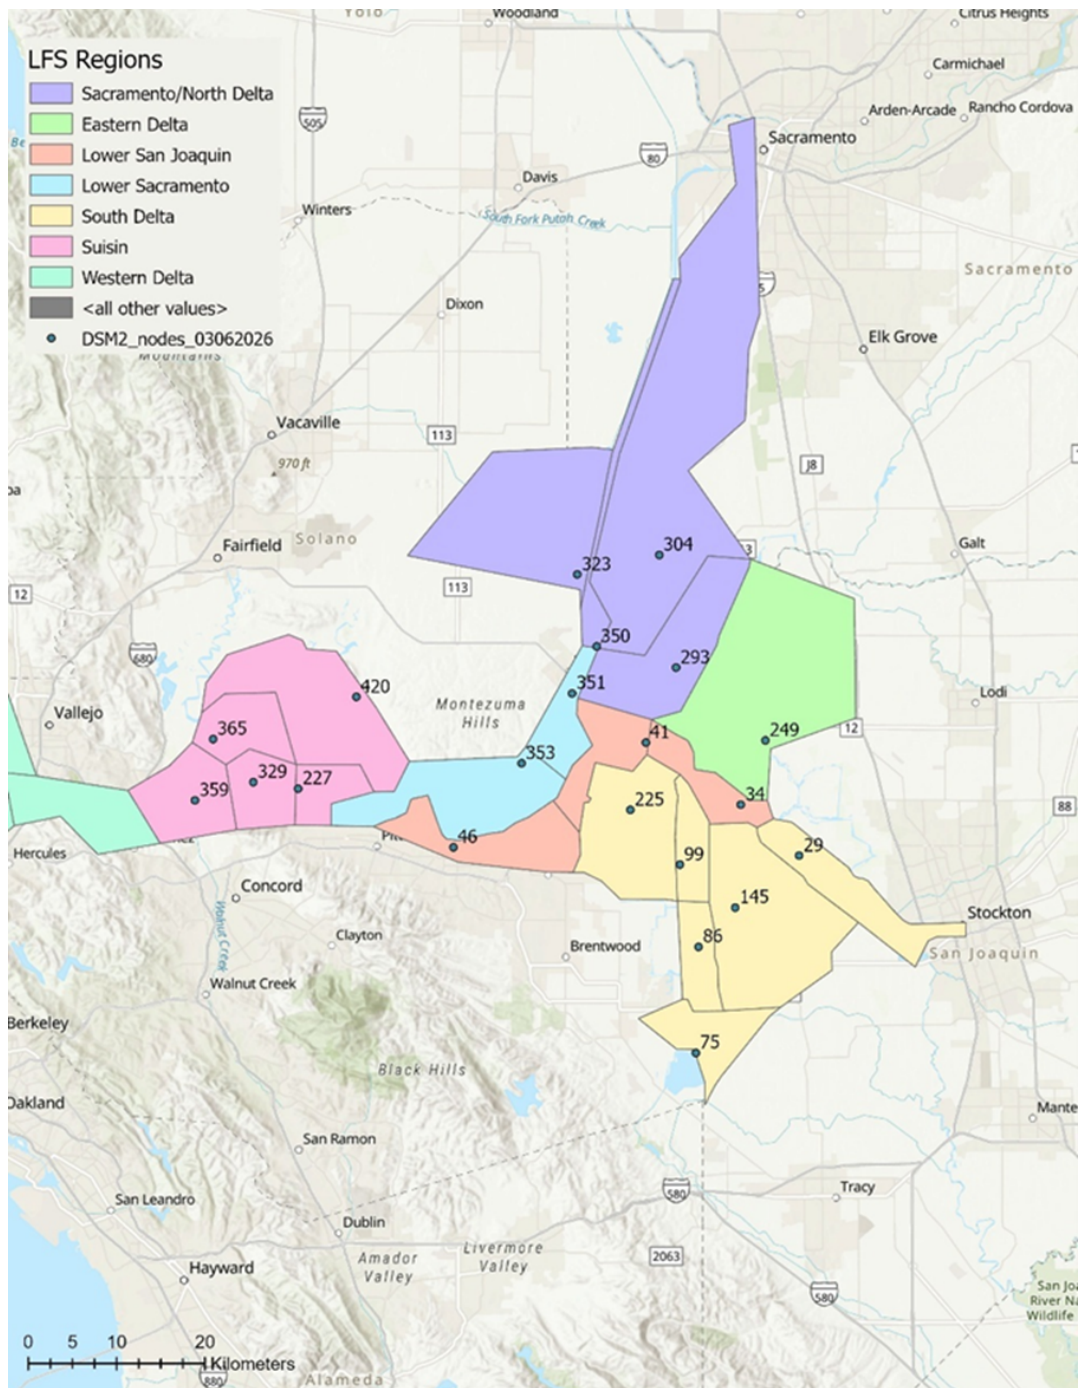


Figure 42: Map of Delta Showing Longfin Smelt Regions and DSM2 Nodes

Table 17: LFS Entrainment Estimate Using PTM with Surface Oriented Particles: Week 2
Ending 06/29/2026

	DSM2	359	359,329,365,350,227,323,304,453,352,9,86,145,72,49,225	NA	NA						
	Nodes										
	LFS	117633685	6677478	304865	4078739	695676	0	0	271390	NA	NA
	Abun- dance (Grouped)										
-	5,066 PTM (%)	0.0	0.0	3.6	13.3	0.7	61.1	10.7	89.4	NA	NA
5,000											
-	3,406 PTM (%)	0.0	0.0	1.3	4.8	0.3	49.1	3.5	59.0	NA	NA
3,500											
-	1,761 PTM (%)	0.0	0.0	0.3	1.1	0.0	30.6	0.5	32.5	NA	NA
2,000											
-	5,066 Entrained	0.0	0.0	1524.3	2511301	13913.5	0.0	0.0	266569.0	0.1	0.1
5,000	(#)										
-	3,406 Entrained	0.0	0.0	609.7	84608.4	4907.0	0.0	0.0	90125.00	0.03	0.03
3,500	(#)										
-	1,761 Entrained	0.0	0.0	0.0	18382.70	0.0	0.0	0.0	18383.00	0.01	0.01
2,000	(#)										

Notes: Values between 0.0 and 0.1 are indicated with <0.1.

The PTM entrained (%) value reflects the total entrained particles from all subregions within an LFS Region divided by the estimated LFS Region abundance.

Key: cfs = cubic feet per second, LFS = Longfin Smelt, OMR = Old and Middle River

Table 18: LFS Entrainment Estimate Using PTM with Surface Oriented Particles: Week 3
Ending 07/06/2026

	DSM2	359	359,329,365,350,227,323,304,453,352,9,86,145,72,49,225	NA	NA						
	Nodes										
	LFS	117633685	6677478	304865	4078739	695676	0	0	271390	NA	NA
	Abun- dance (Grouped)										
-	5,009 PTM (%)	0.0	0.0	9.5	25.9	2.2	70.3	35.7	143.6	NA	NA
5,000											
-	3,406 PTM (%)	0.0	0.0	4.5	13.3	0.8	59.4	17.1	95.1	NA	NA
3,500											

Table 18: LFS Entrainment Estimate Using PTM with Surface Oriented Particles: Week 3
Ending 07/06/2026

-	1,704 PTM (%)	0.0	0.0	1.1	3.1	0.1	38.5	2.7	45.5	NA
2,000										
-	5,009 Entrained	0.0	8914.1	7621.6	4689016	21088.1	0.0	0.0	546525.0	0.2
5,000	(#)									
-	3,406 Entrained	0.0	0.0	2134.1	2428272	20901.1	0.0	0.0	265863.0	0.1
3,500	(#)									
-	1,704 Entrained	0.0	0.0	304.9	55402.7	807.6	0.0	0.0	56515.00	0.02
2,000	(#)									

Notes: Values between 0.0 and 0.1 are indicated with <0.1.

The PTM entrained (%) value reflects the total entrained particles from all subregions within an LFS Region divided by the estimated LFS Region abundance.

Key: cfs = cubic feet per second, LFS = Longfin Smelt, OMR = Old and Middle River

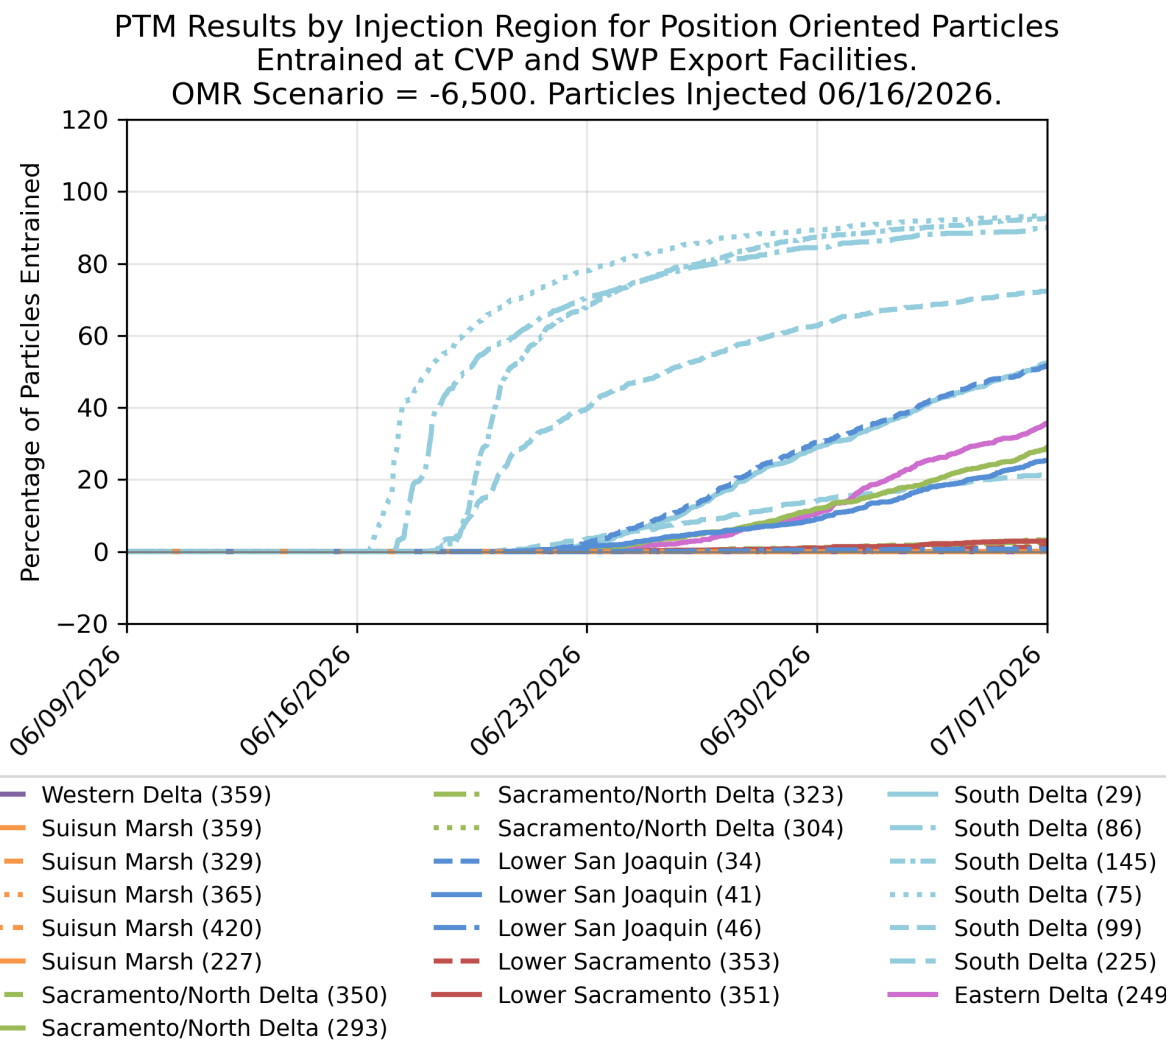


Figure 43: Average PTM Results by Injection Region for Surface Oriented Particles Entrained at CVP and SWP. OMR Scenario -6,500 cfs. Particles Injected 06/16/2026

PTM Results by Injection Region for Position Oriented Particles
 Entrained at CVP and SWP Export Facilities.
 OMR Scenario = -5,000. Particles Injected 06/16/2026.

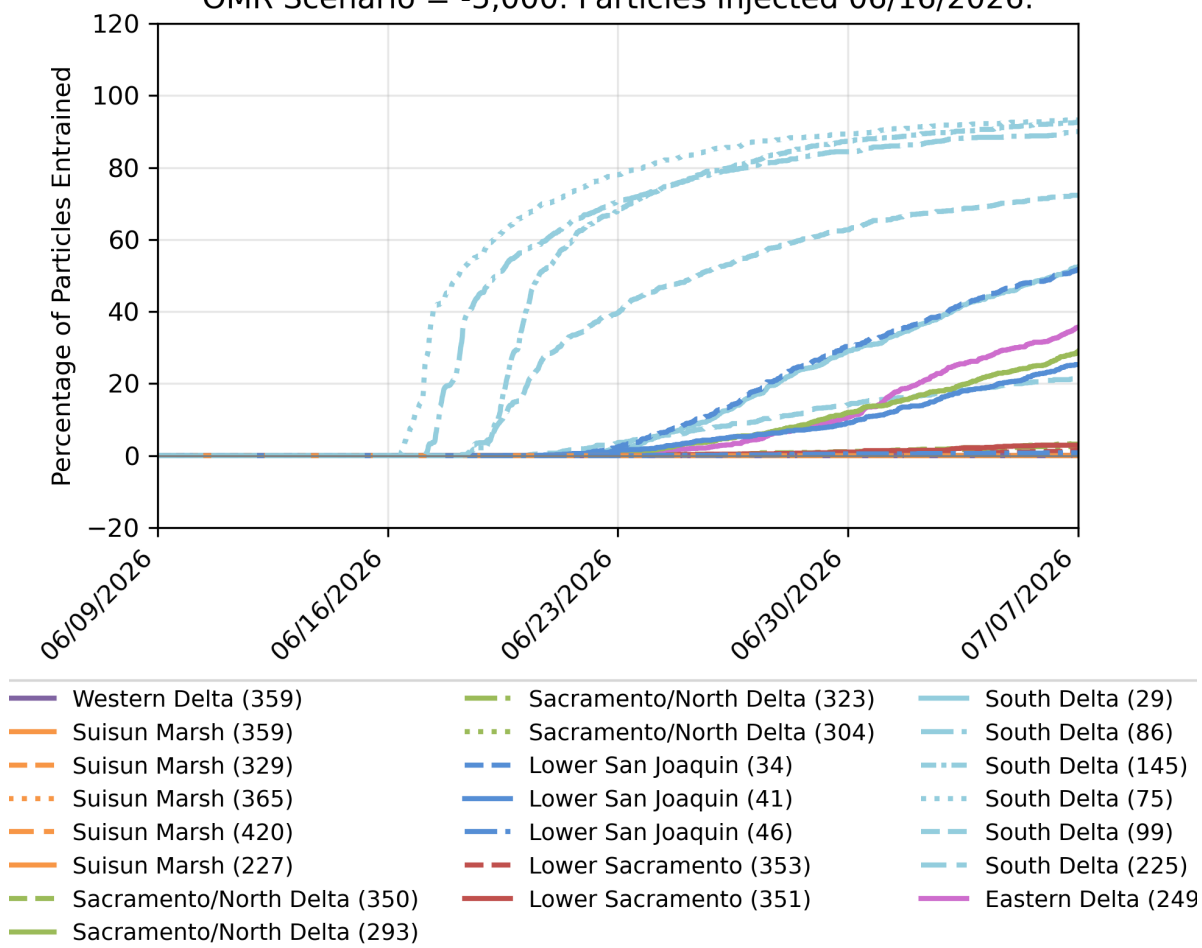


Figure 44: Average PTM Results by Injection Region for Surface Oriented Particles Entrained at CVP and SWP. OMR Scenario -5,000 cfs. Particles Injected 06/16/2026

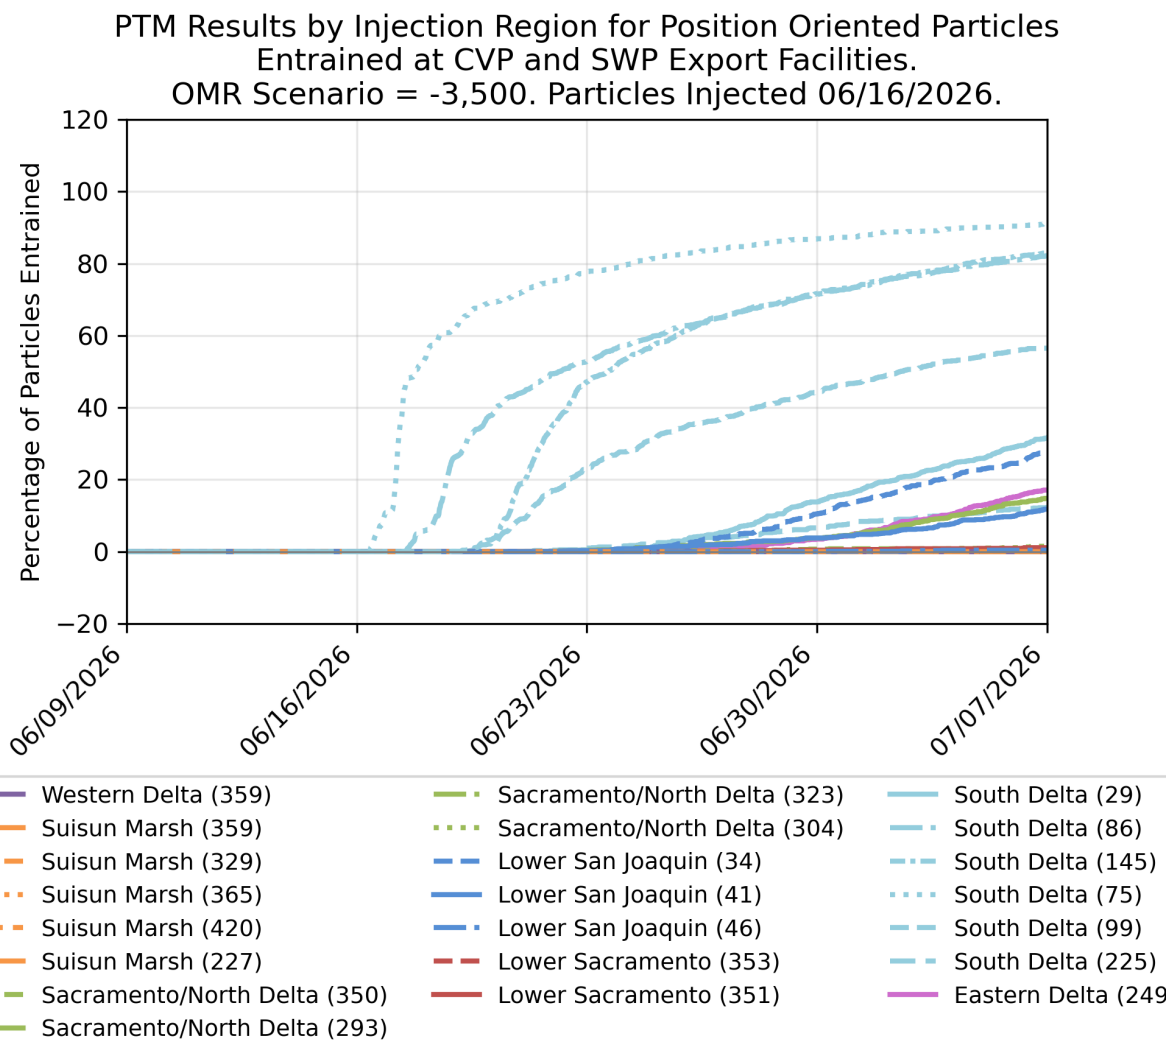


Figure 45: Average PTM Results by Injection Region for Surface Oriented Particles Entrained at CVP and SWP. OMR Scenario -3,500 cfs. Particles Injected 06/16/2026

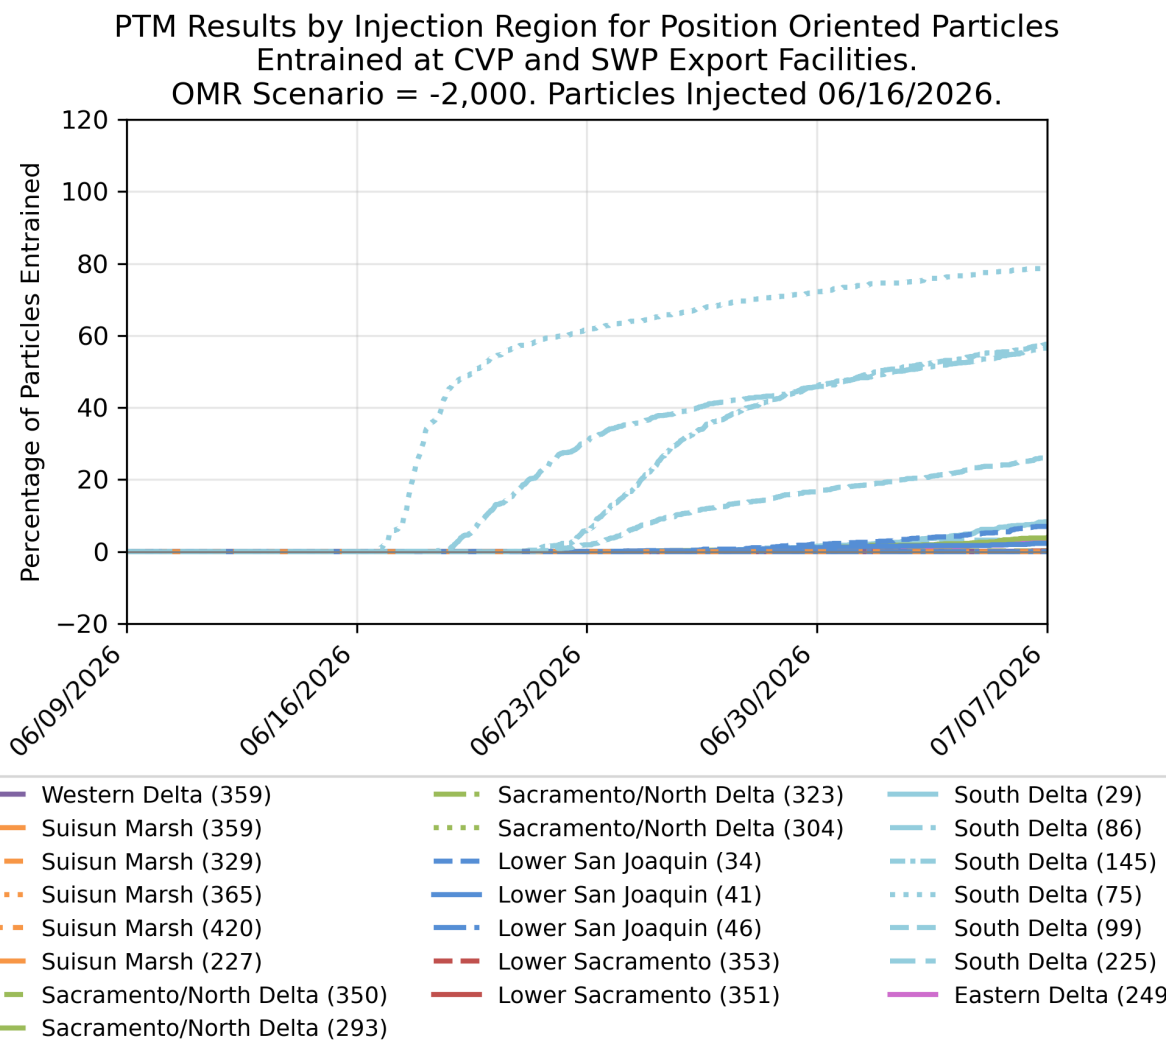


Figure 46: Average PTM Results by Injection Region for Surface Oriented Particles Entrained at CVP and SWP. OMR Scenario -2,000 cfs. Particles Injected 06/16/2026